

How to change: VW Golf 4 air filter – replacement guide

 VIDEO TUTORIAL


Important!

This replacement procedure can be used for:
VW BORA (1J2) 1.6, VW BORA Variant (1J6) 1.6, VW GOLF IV (1J1) 1.6, VW GOLF IV Variant (1J5) 1.6

The steps may slightly vary depending on the car design.



REPLACEMENT: AIR FILTER – VW GOLF 4. TOOLS YOU'LL NEED:

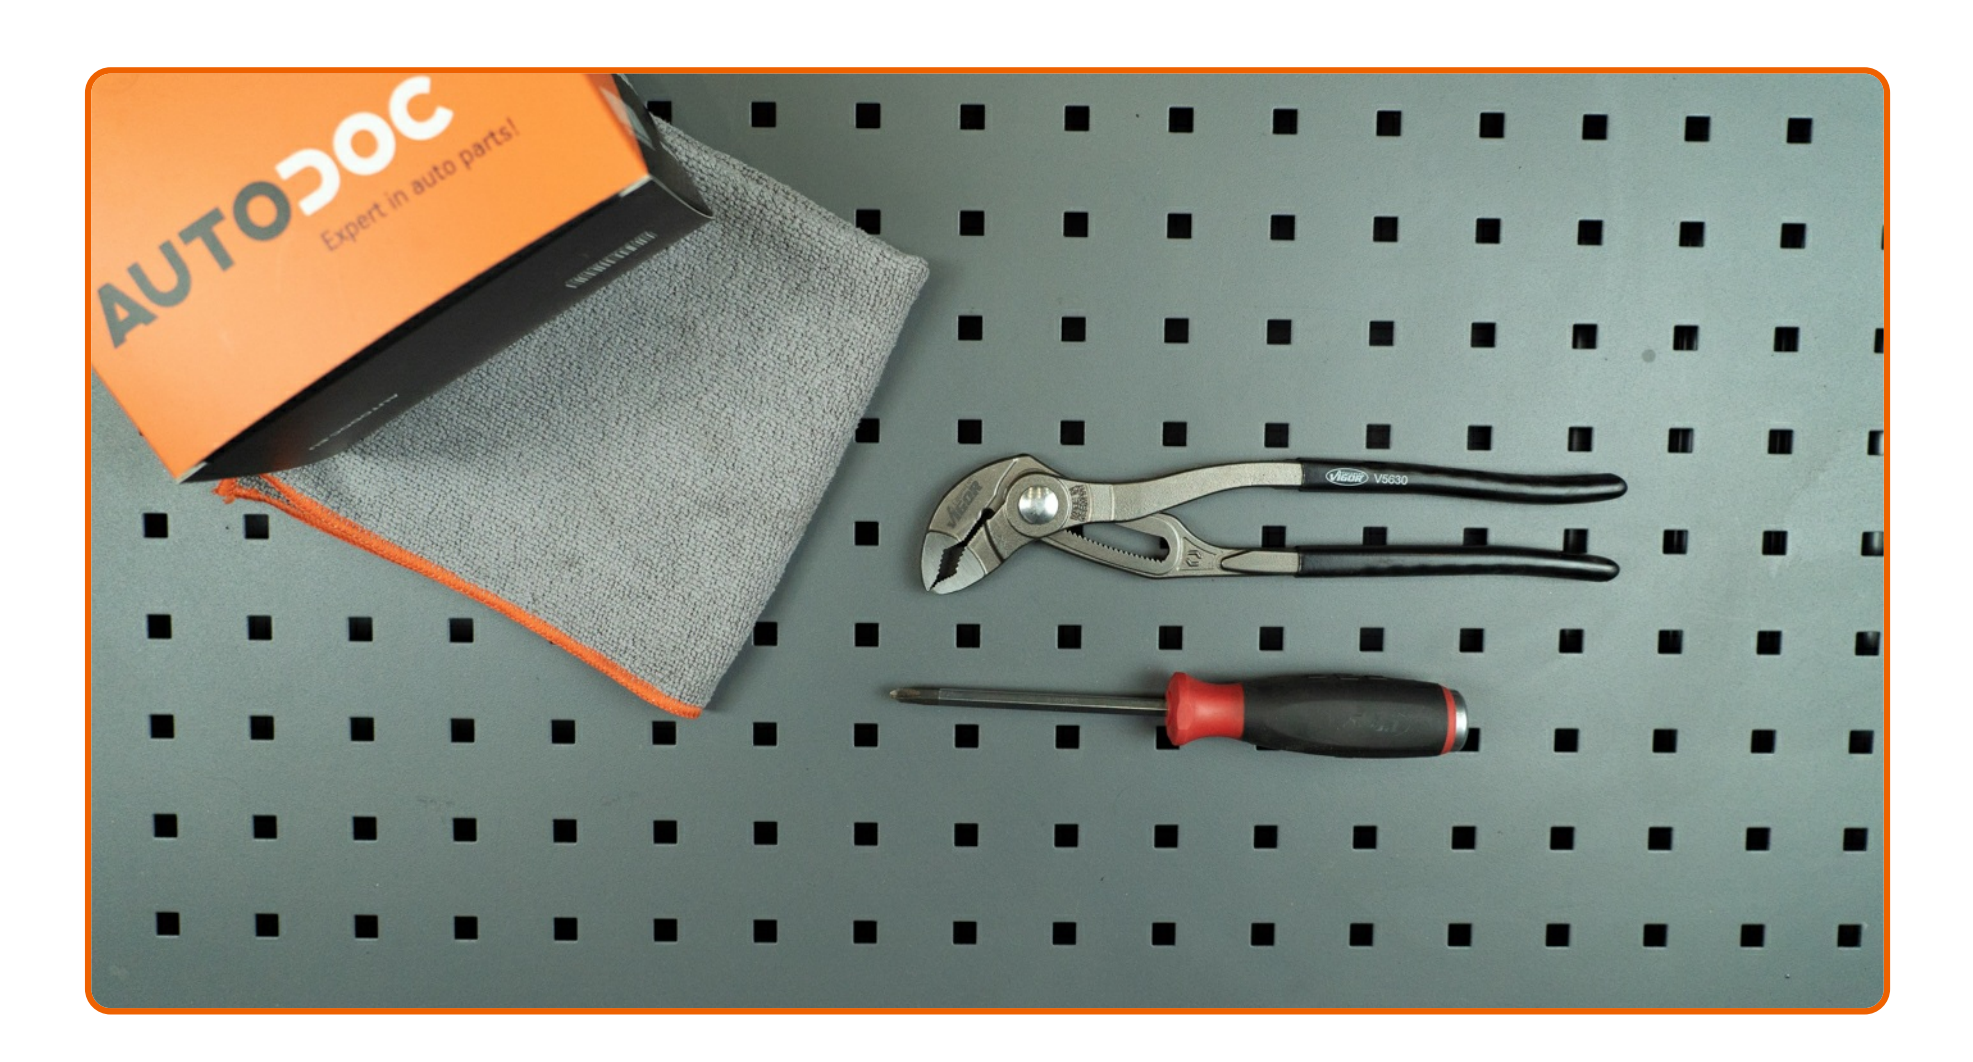

- Phillips screwdriver
- Water pump pliers
- Microfibre towel
- Fender cover




Replacement: air filter – VW Golf 4. Tip from AUTODOC:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.


REPLACEMENT: AIR FILTER – VW GOLF 4. RECOMMENDED SEQUENCE OF STEPS:

1

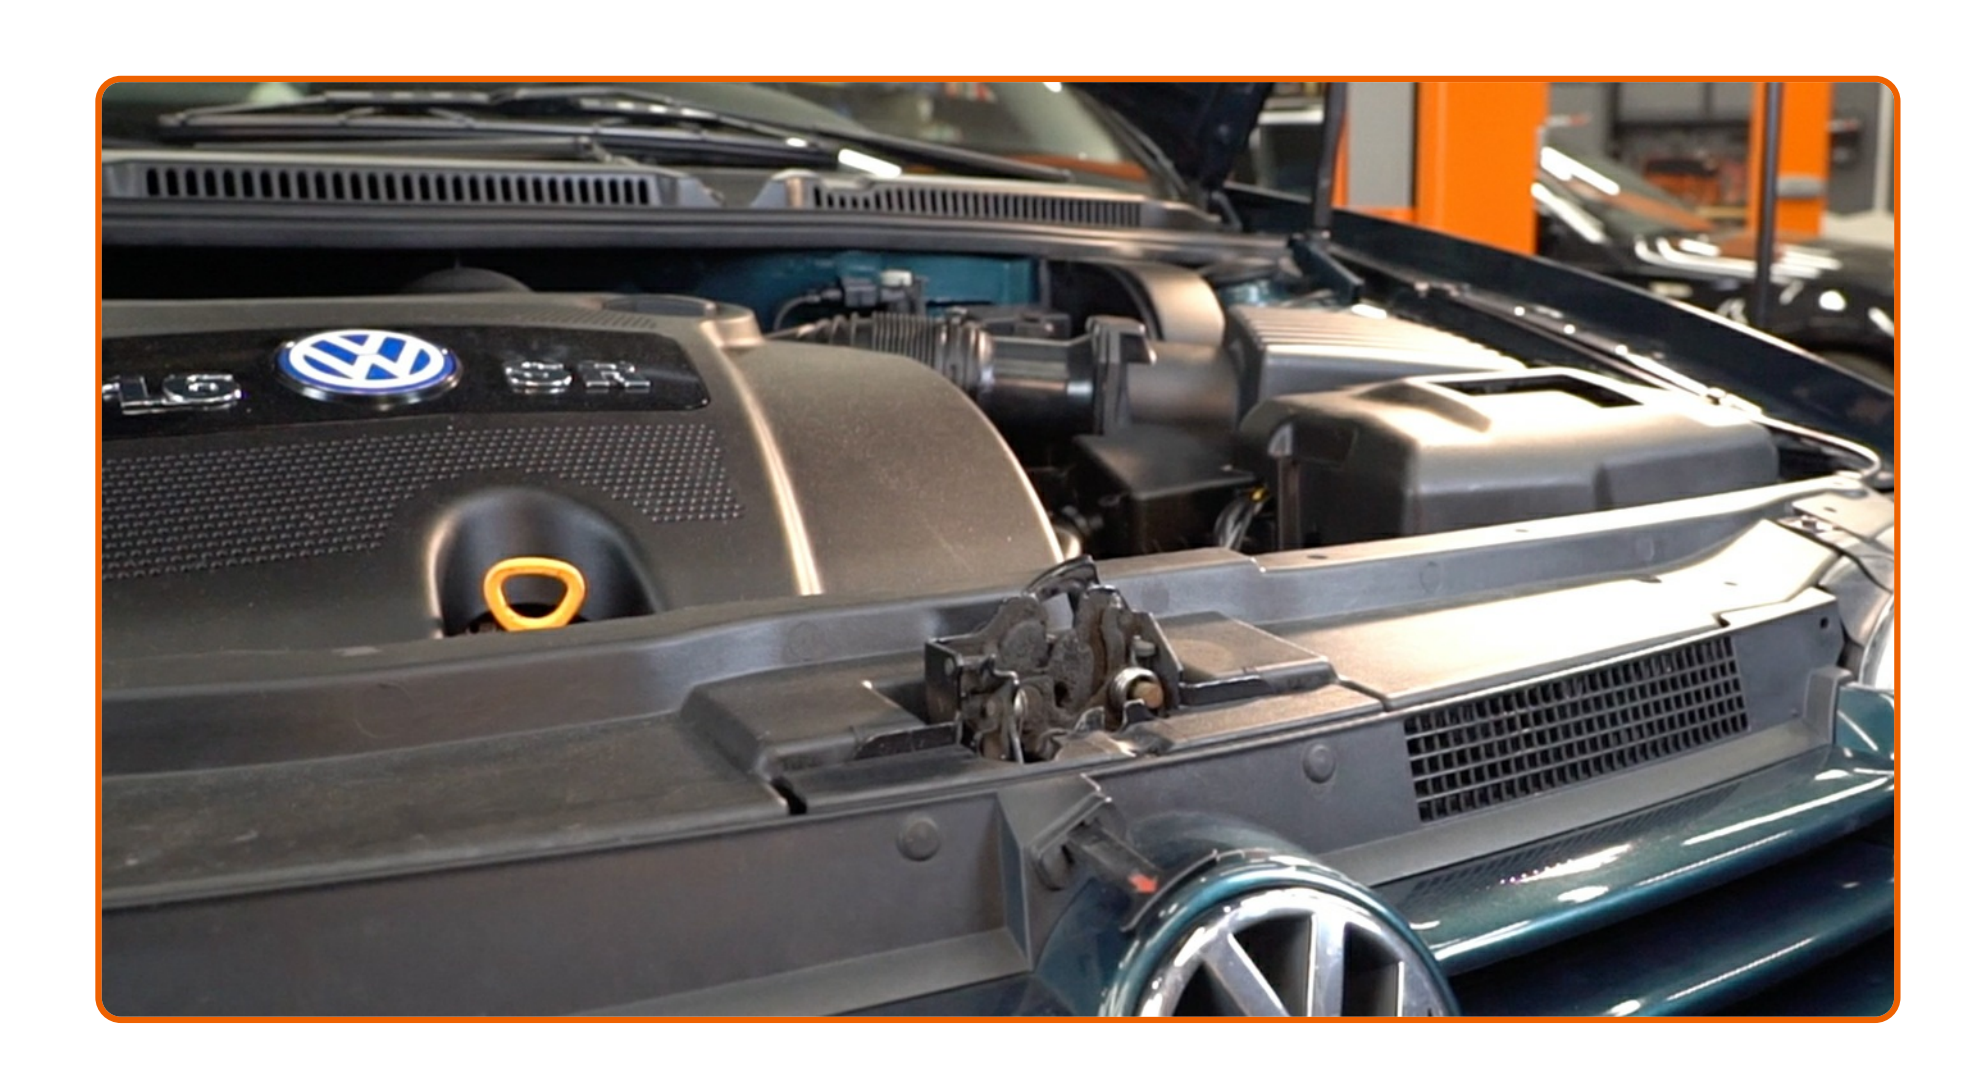


Open the bonnet.

2

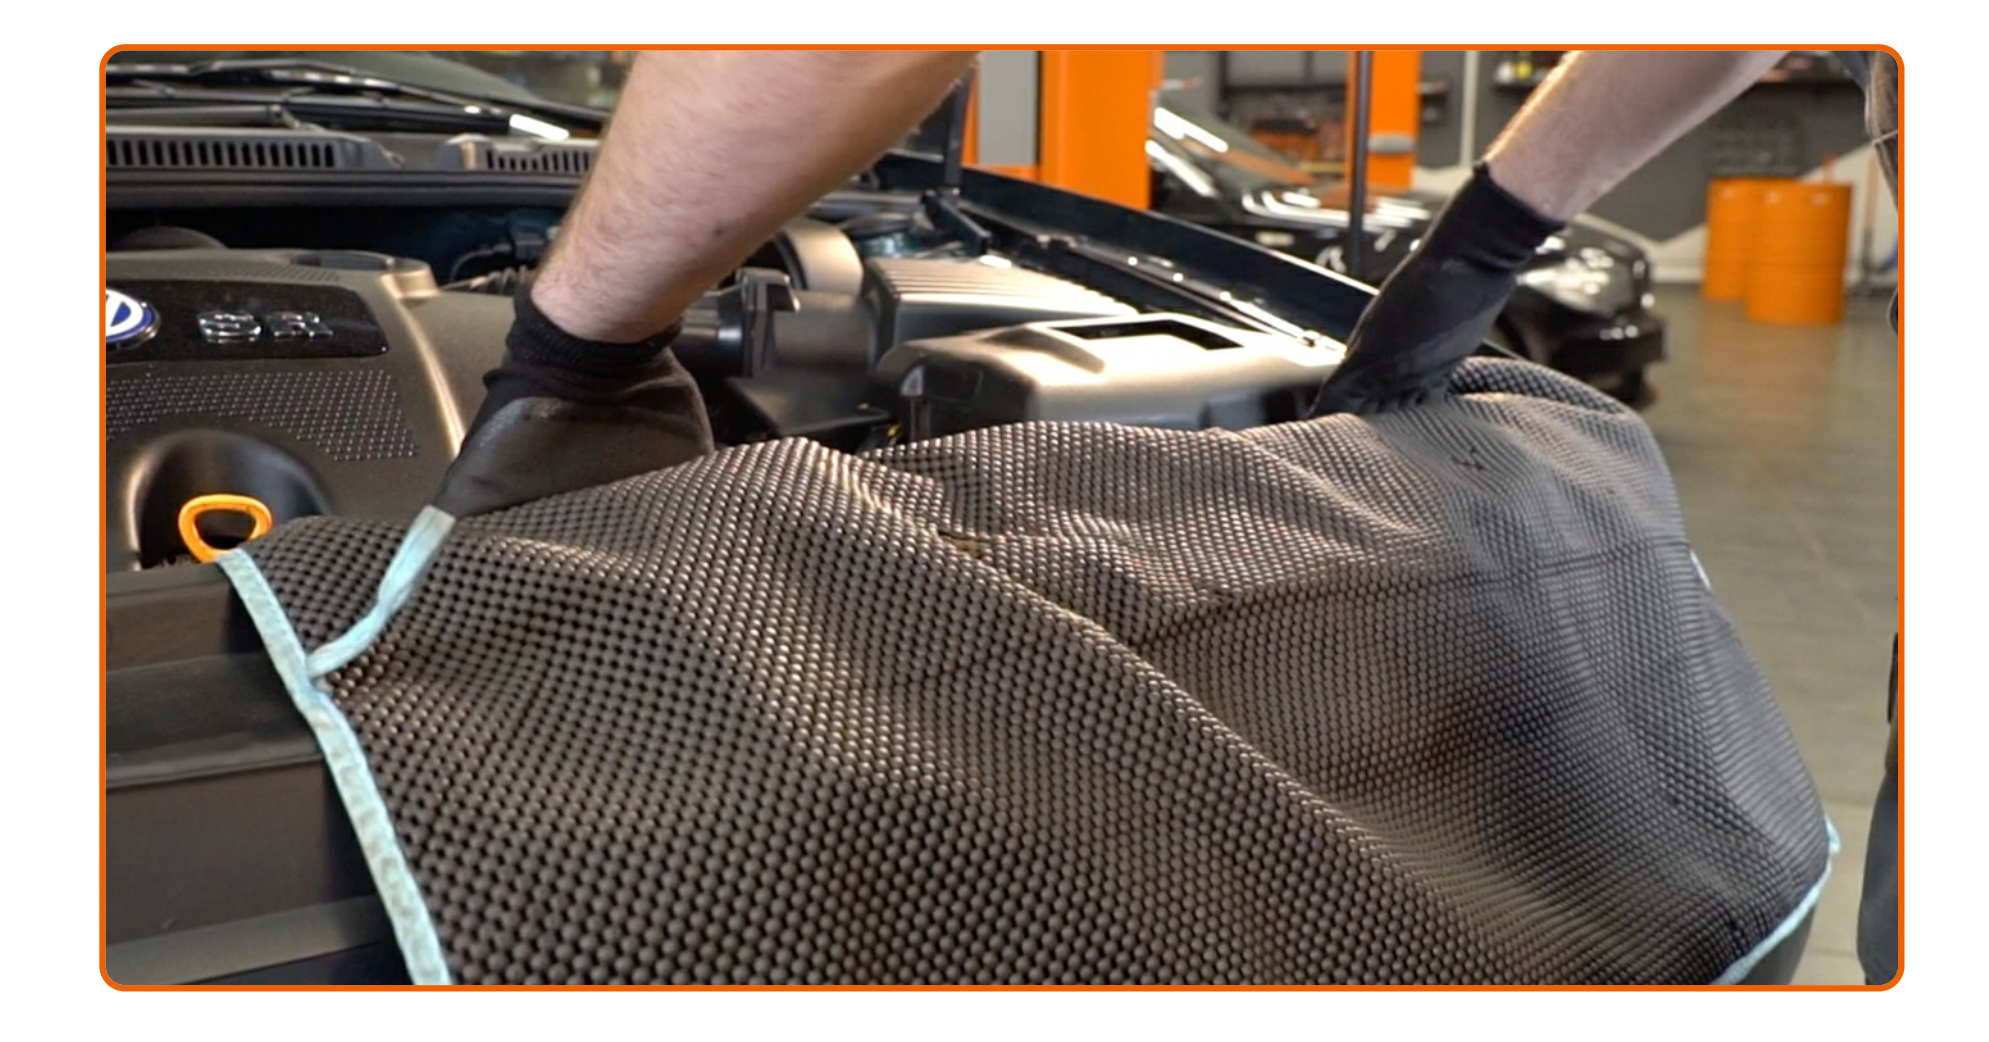


Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3

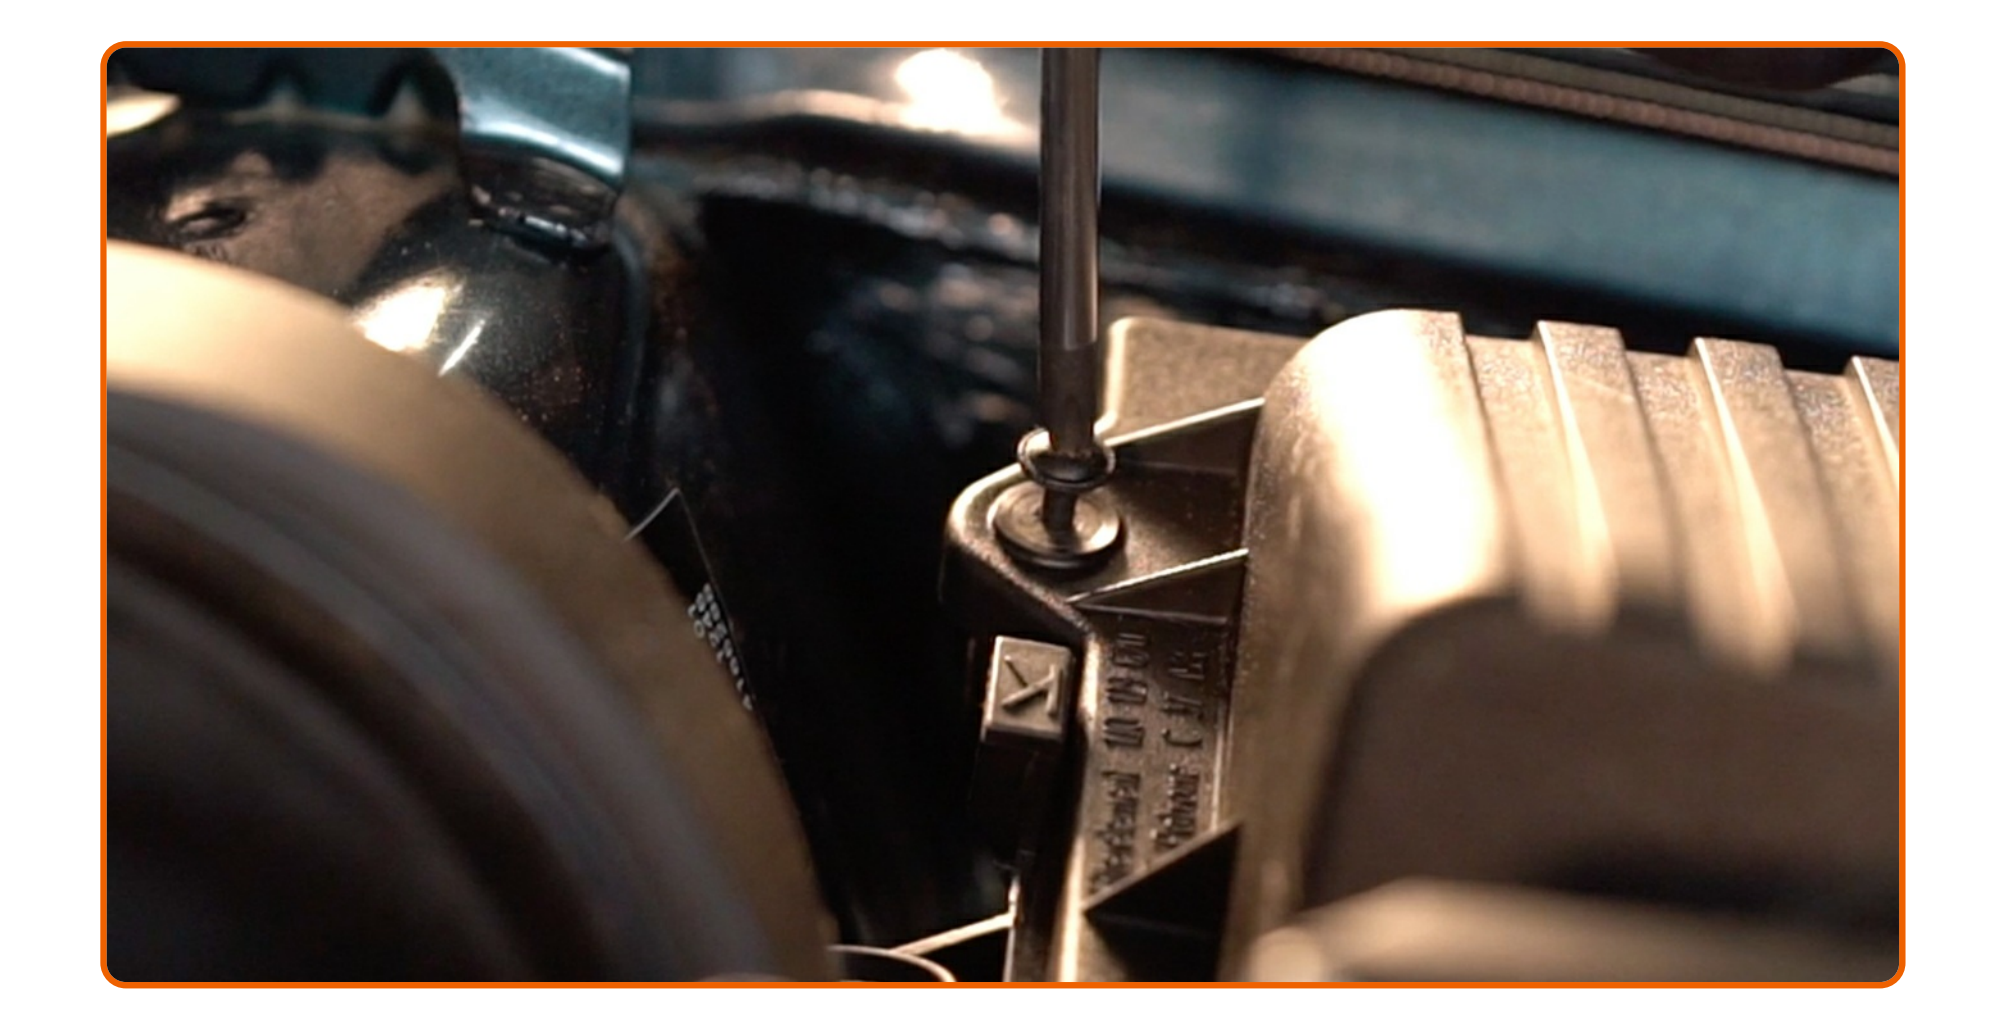

Undo the fastening screws of the air filter cover. Use a Phillips screwdriver.

4

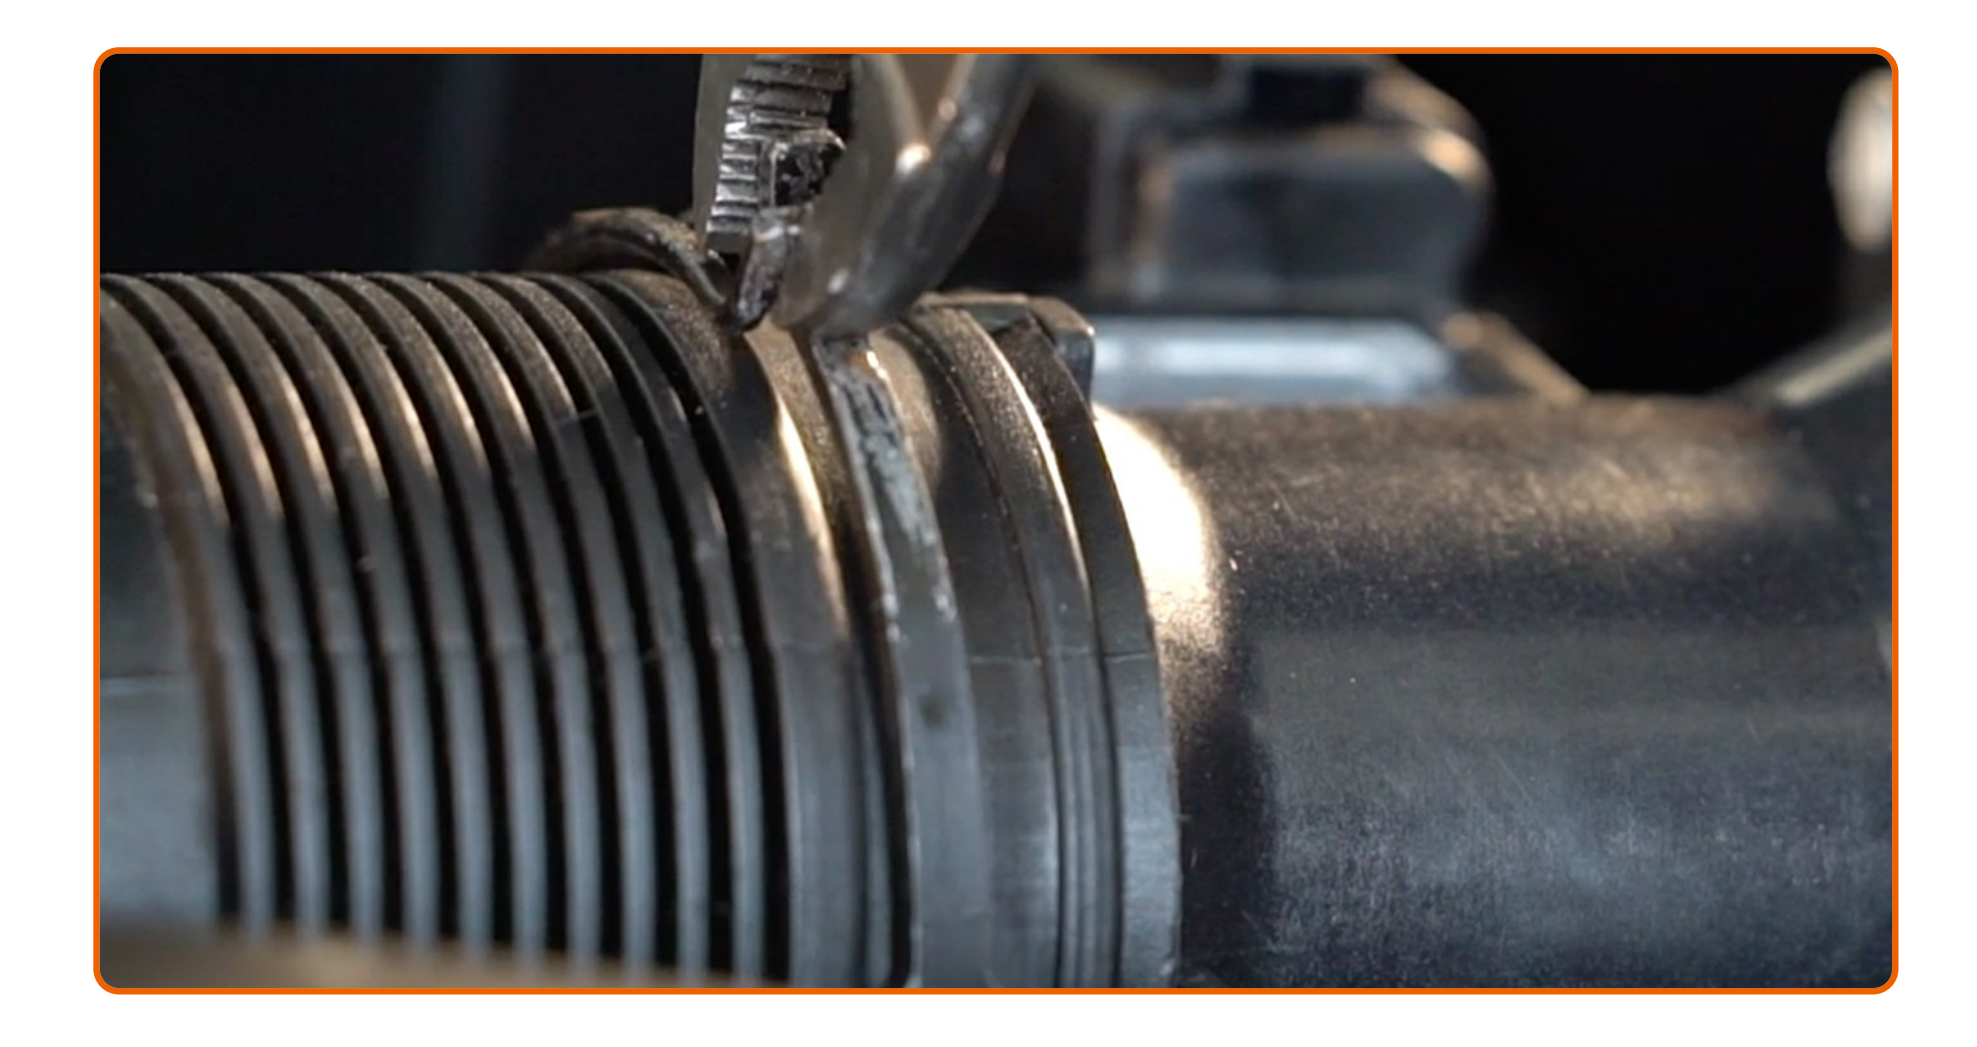


Detach the air intake hose clamp. Use water pump pliers.

5



Unplug the mass air flow sensor connector.

6

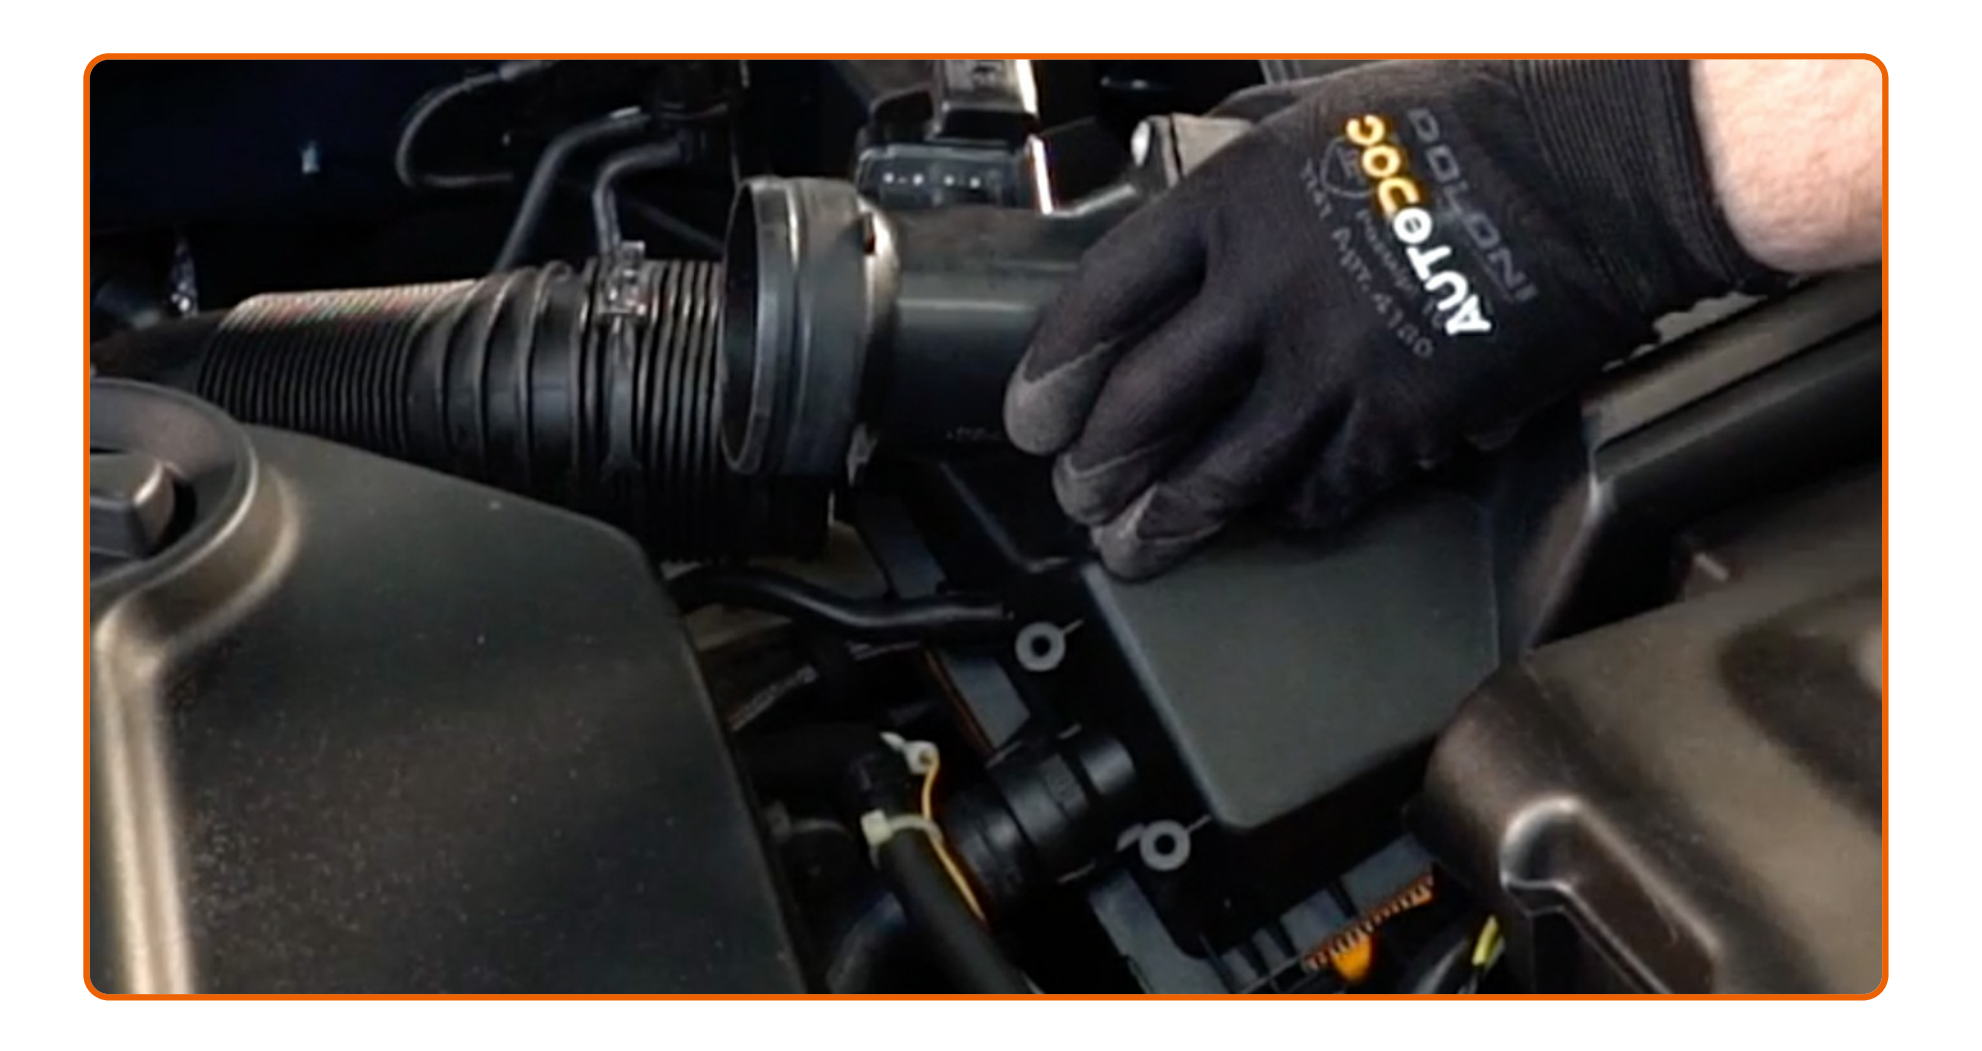

Disconnect the air intake pipe from the air filter housing.

7



Slightly raise the cover of the air filter housing.

8



Remove the filter element from the filter housing.

9



Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.

10



Clean the air filter cover and housing.

Replacement: air filter – VW Golf 4. Professionals recommend:


- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

11



Remove the microfibre towel from the air intake hose.

12

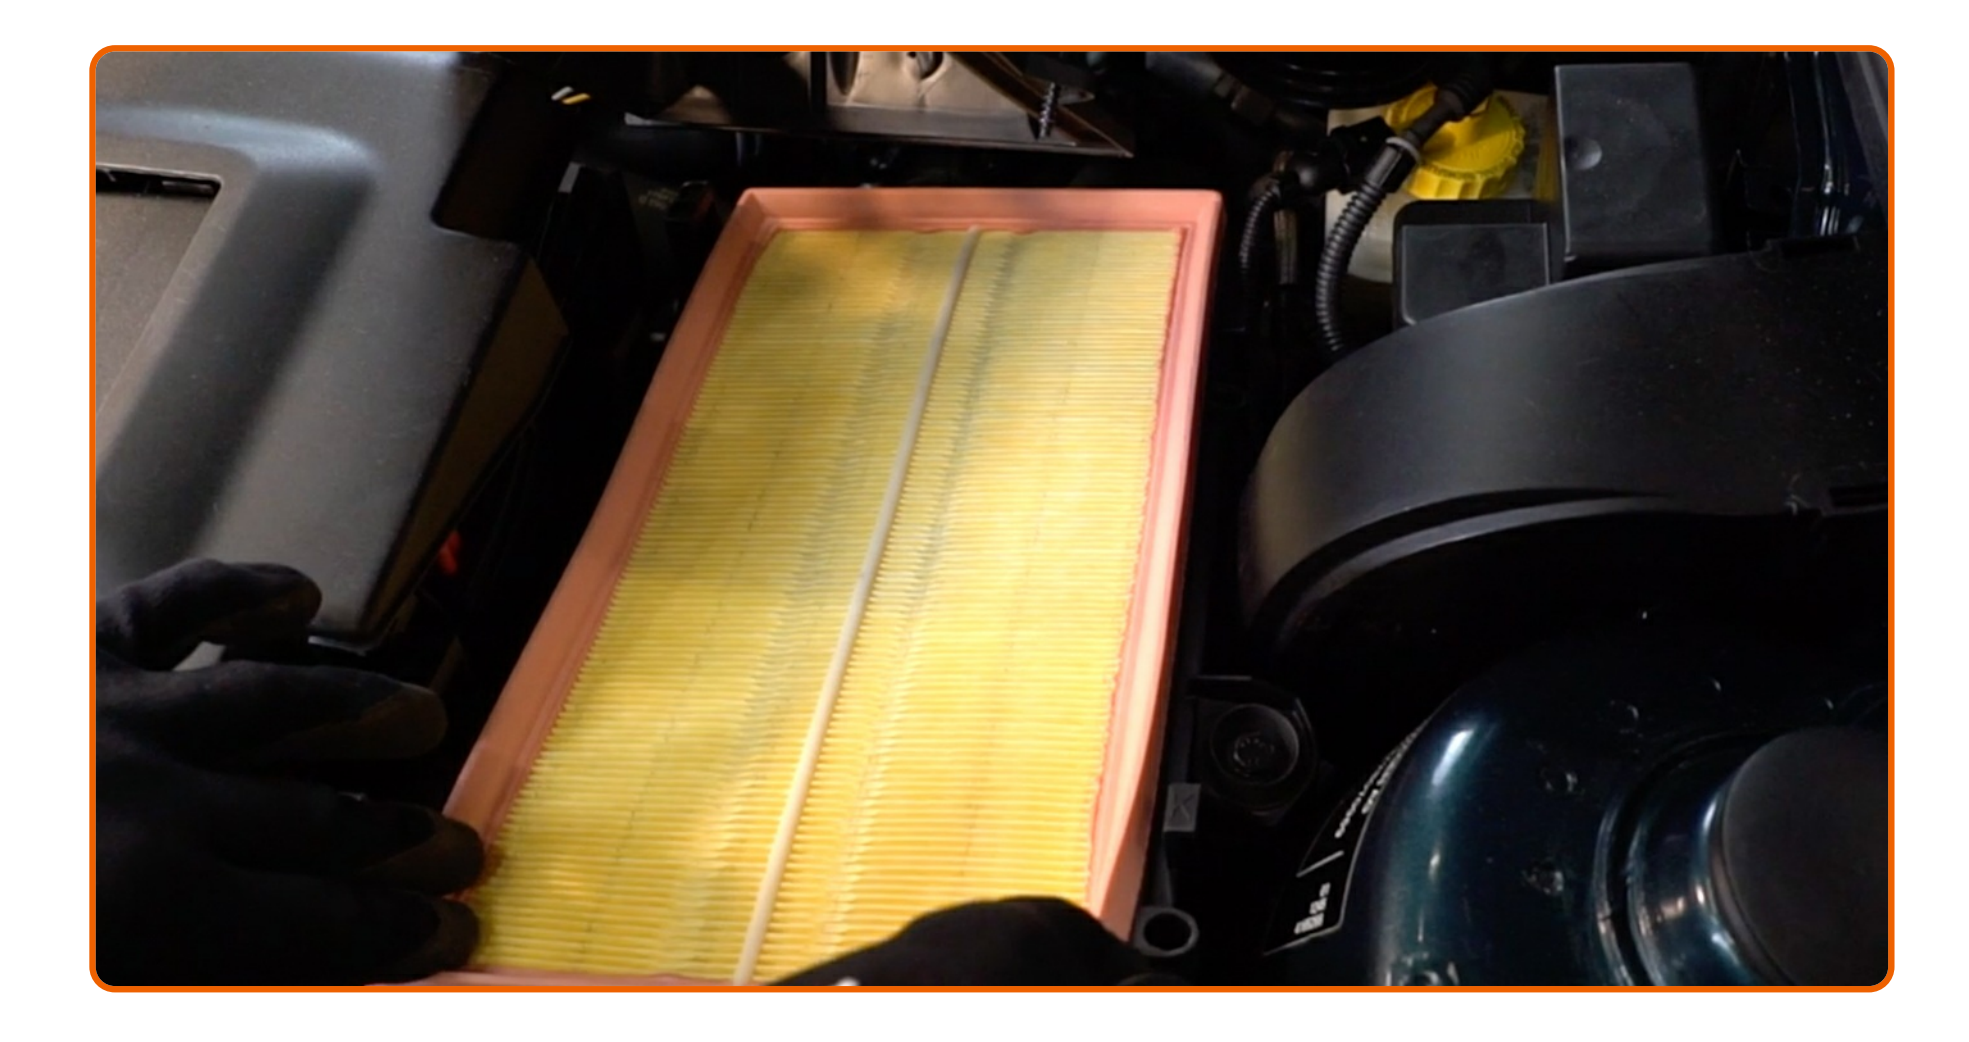


Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

Replacement: air filter – VW Golf 4. Tip from AUTODOC experts:

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – VW Golf 4.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

13

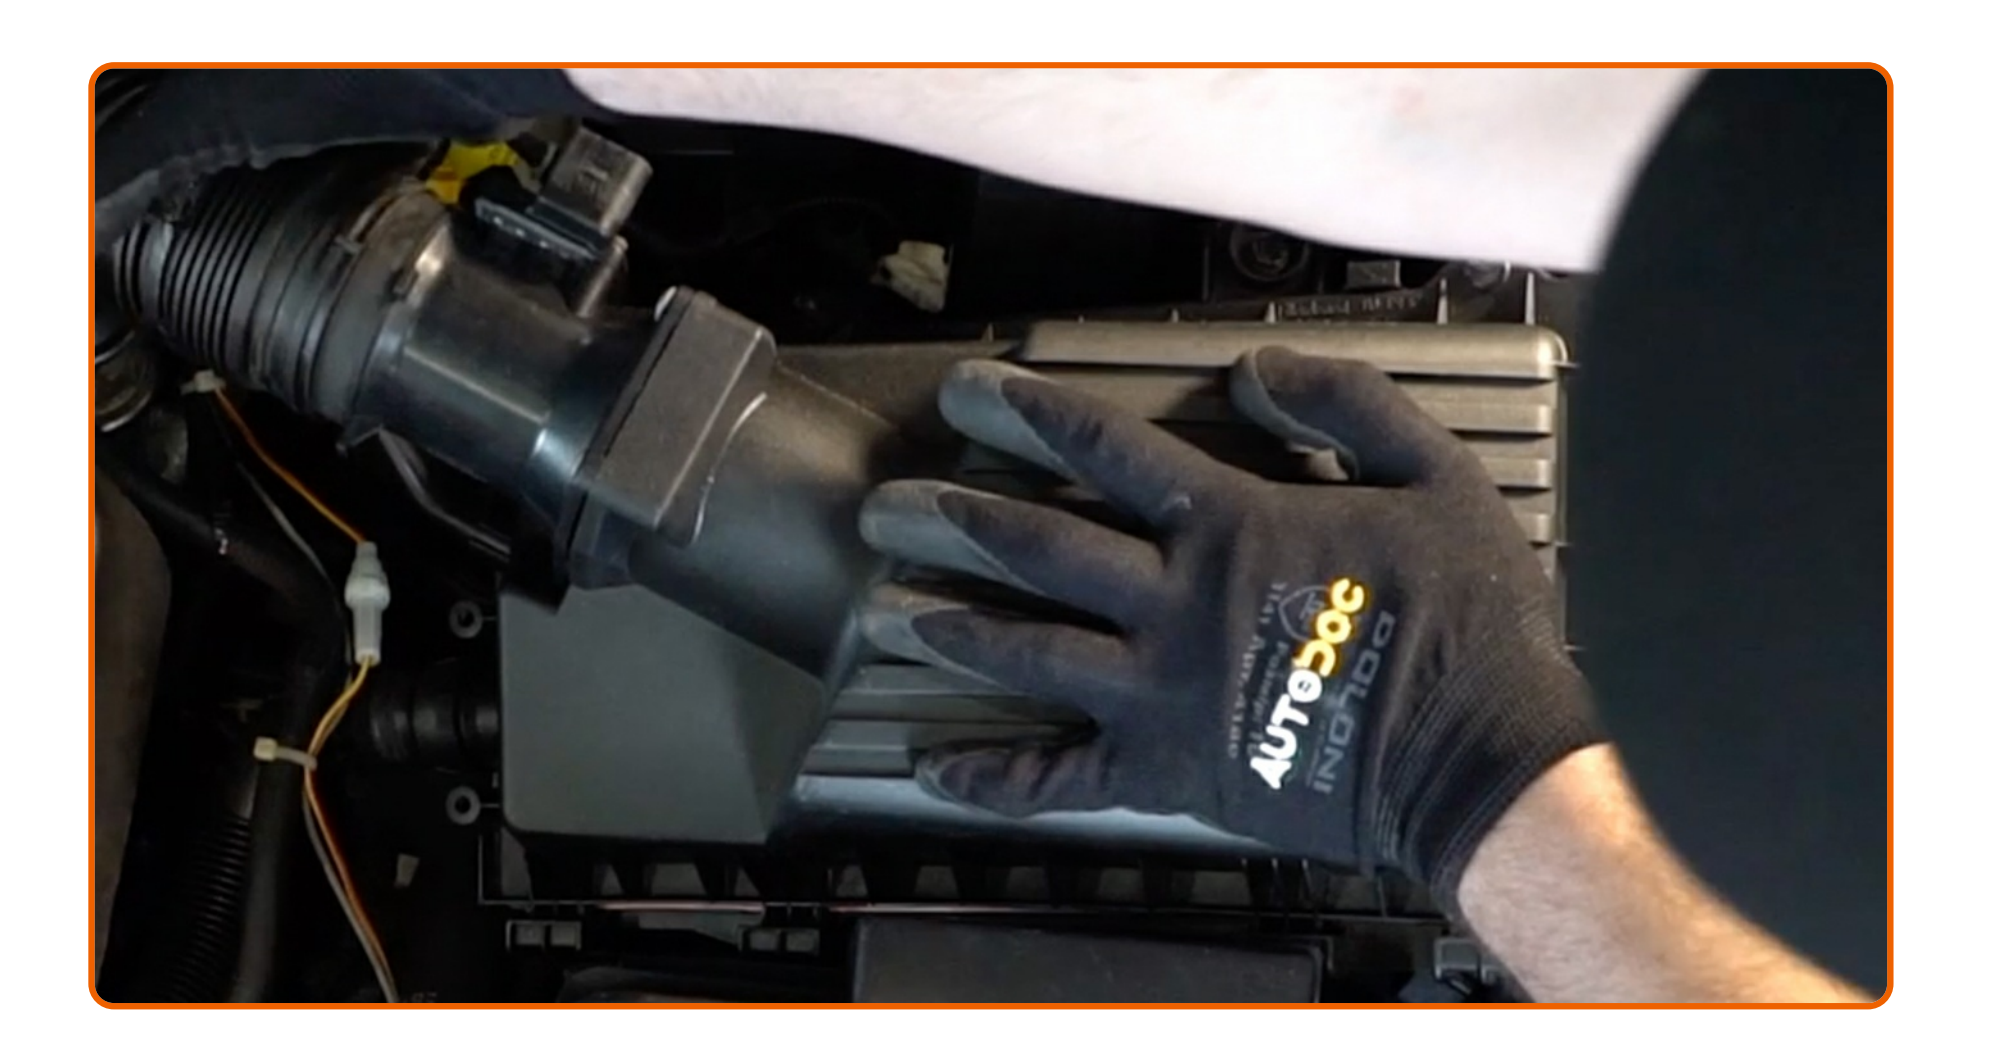


Reinstall the air filter cover. Fasten it.

14




Connect the air intake pipe to the air filter housing.

15

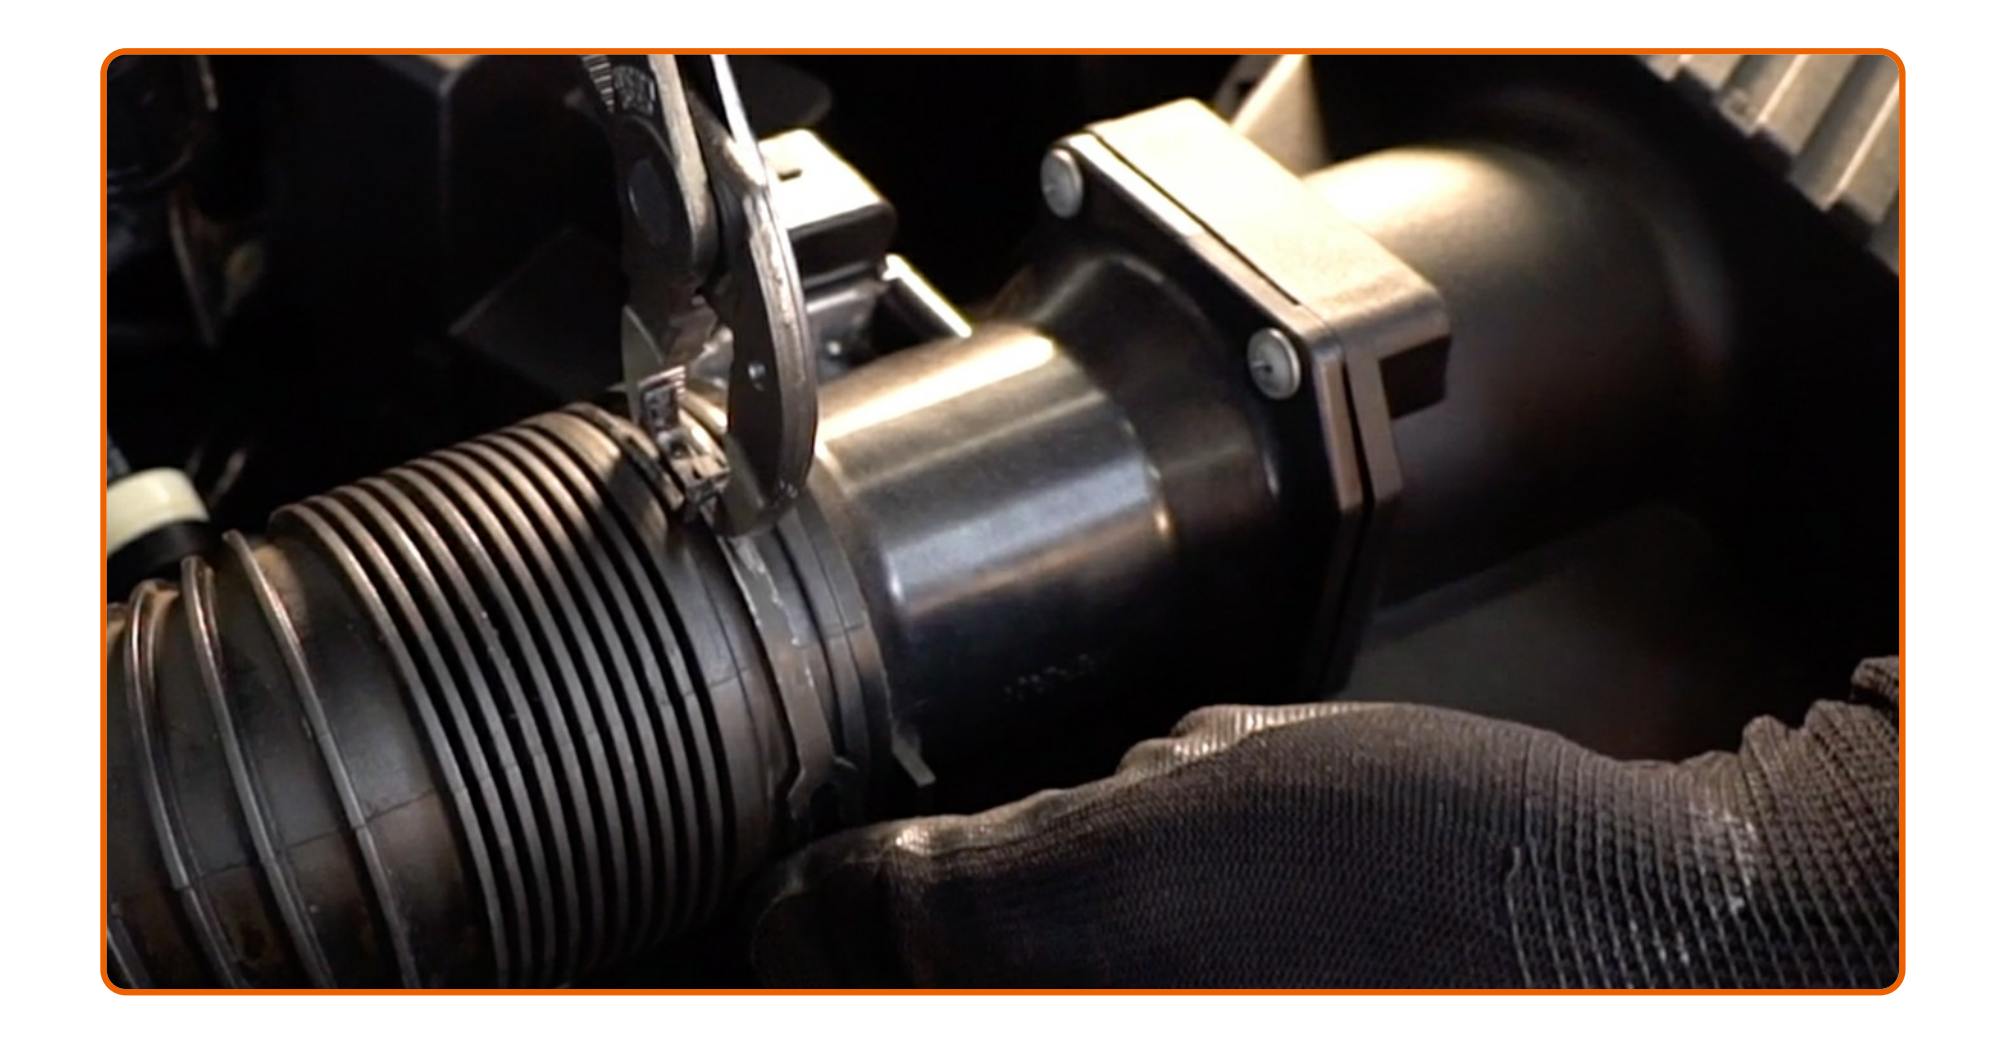


Fasten the clamp on the air intake hose. Use water pump pliers.

16

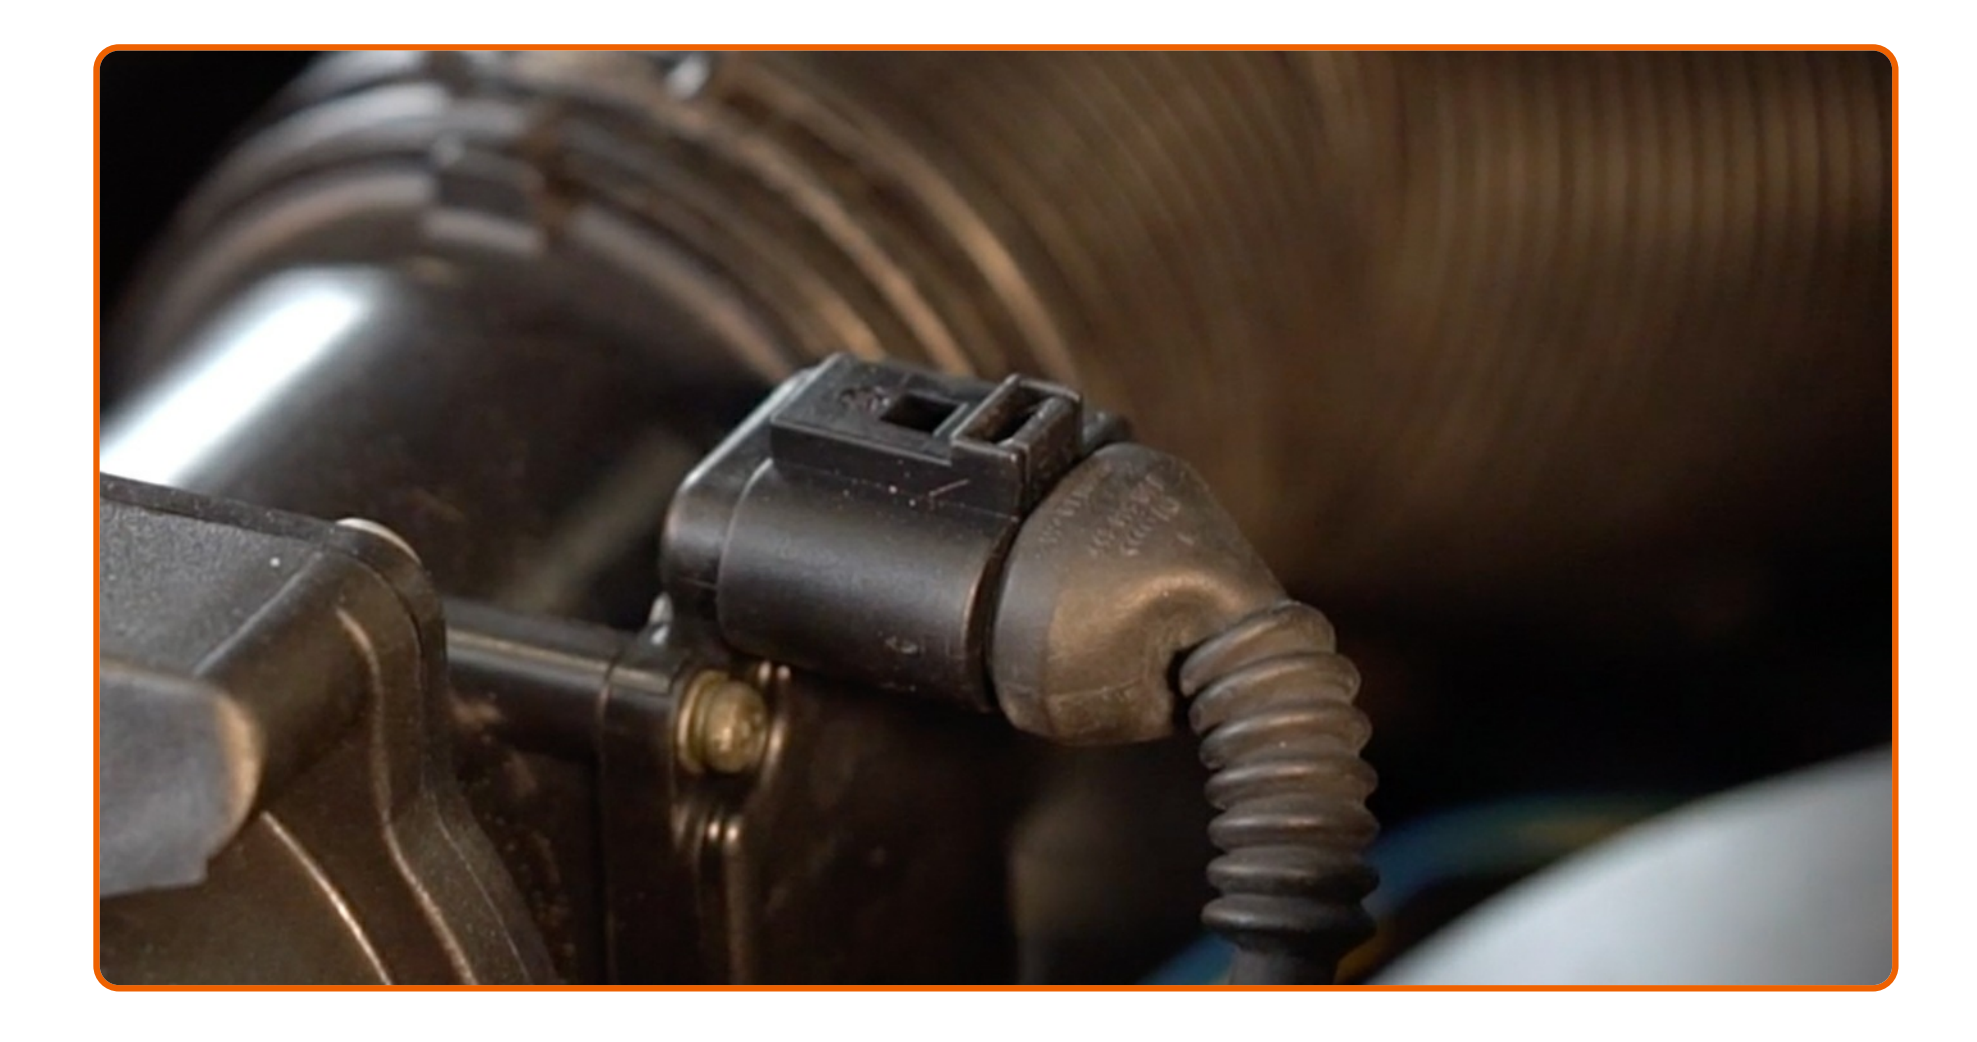


Plug in the mass air flow sensor conntector.

17

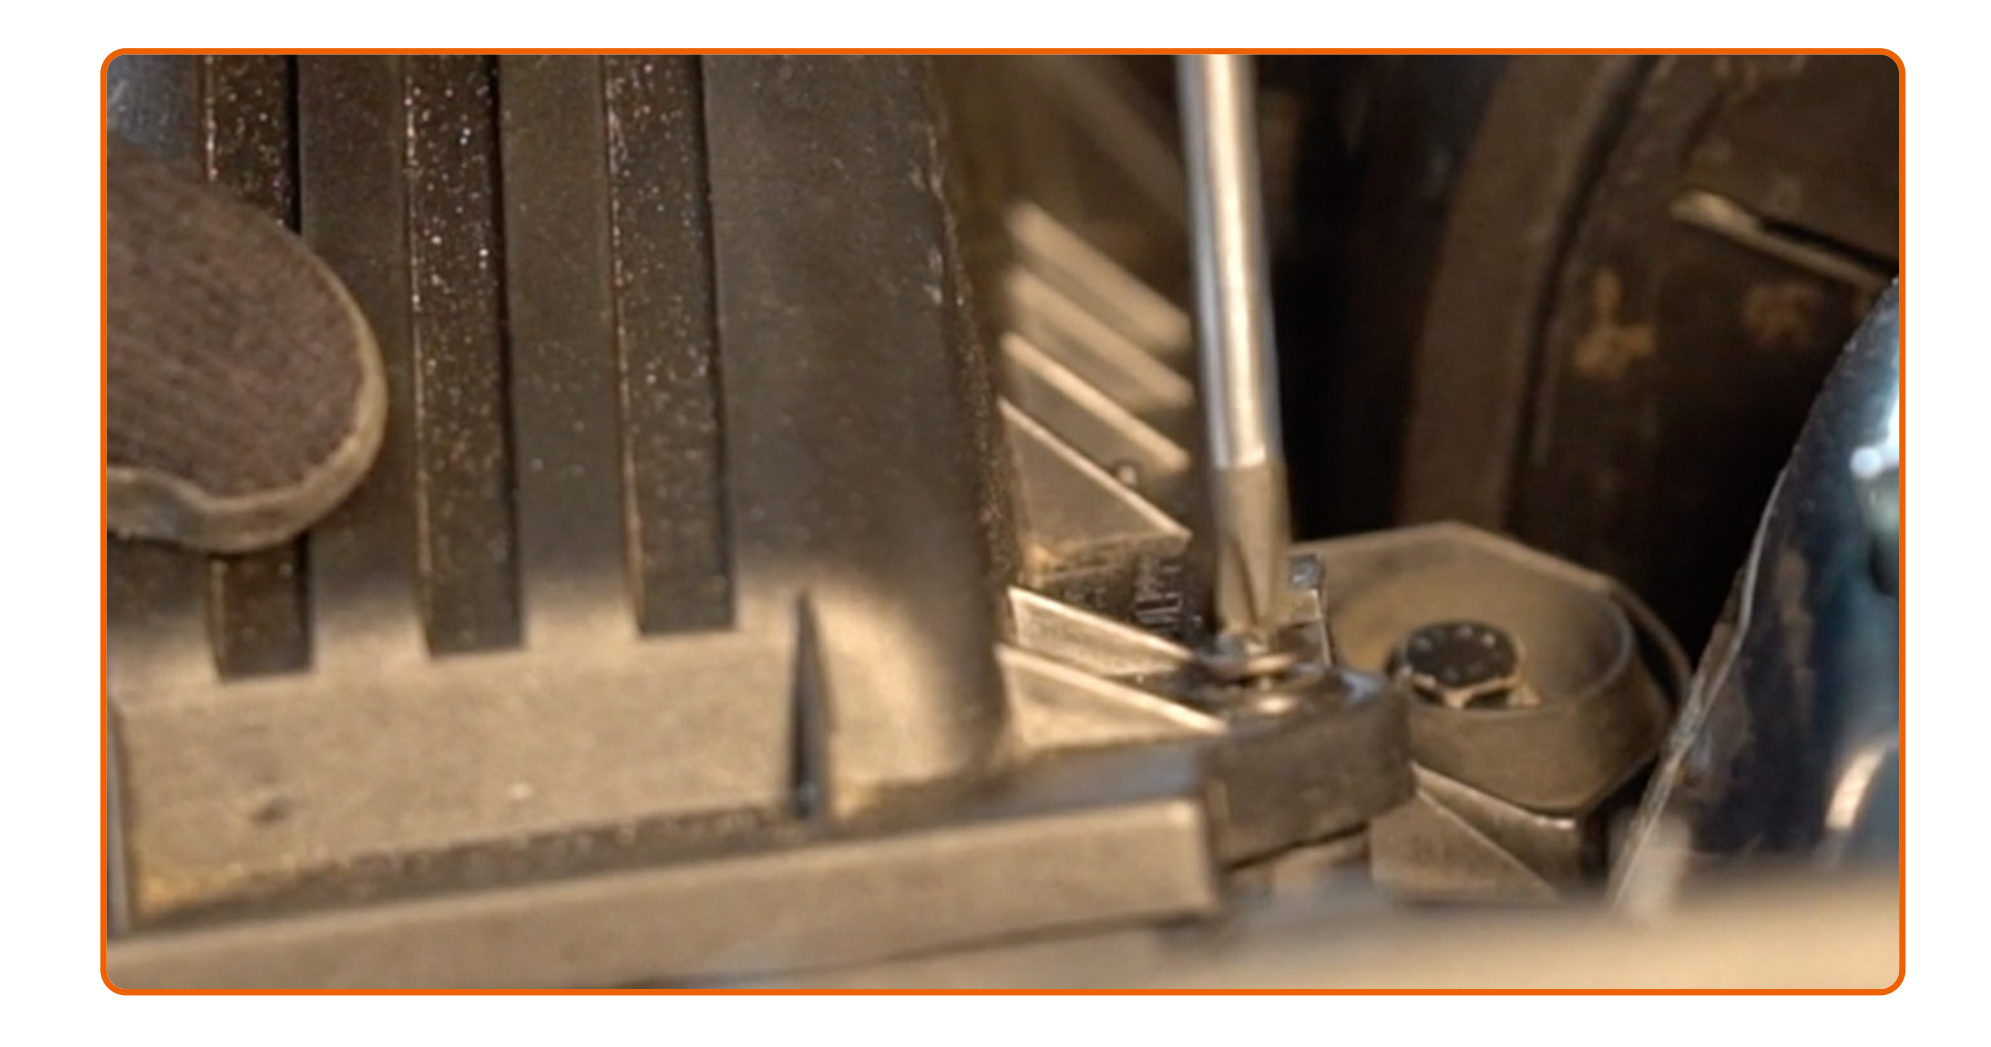

Screw in the fastening screws of the air filter cover. Use a Phillips screwdriver.

18

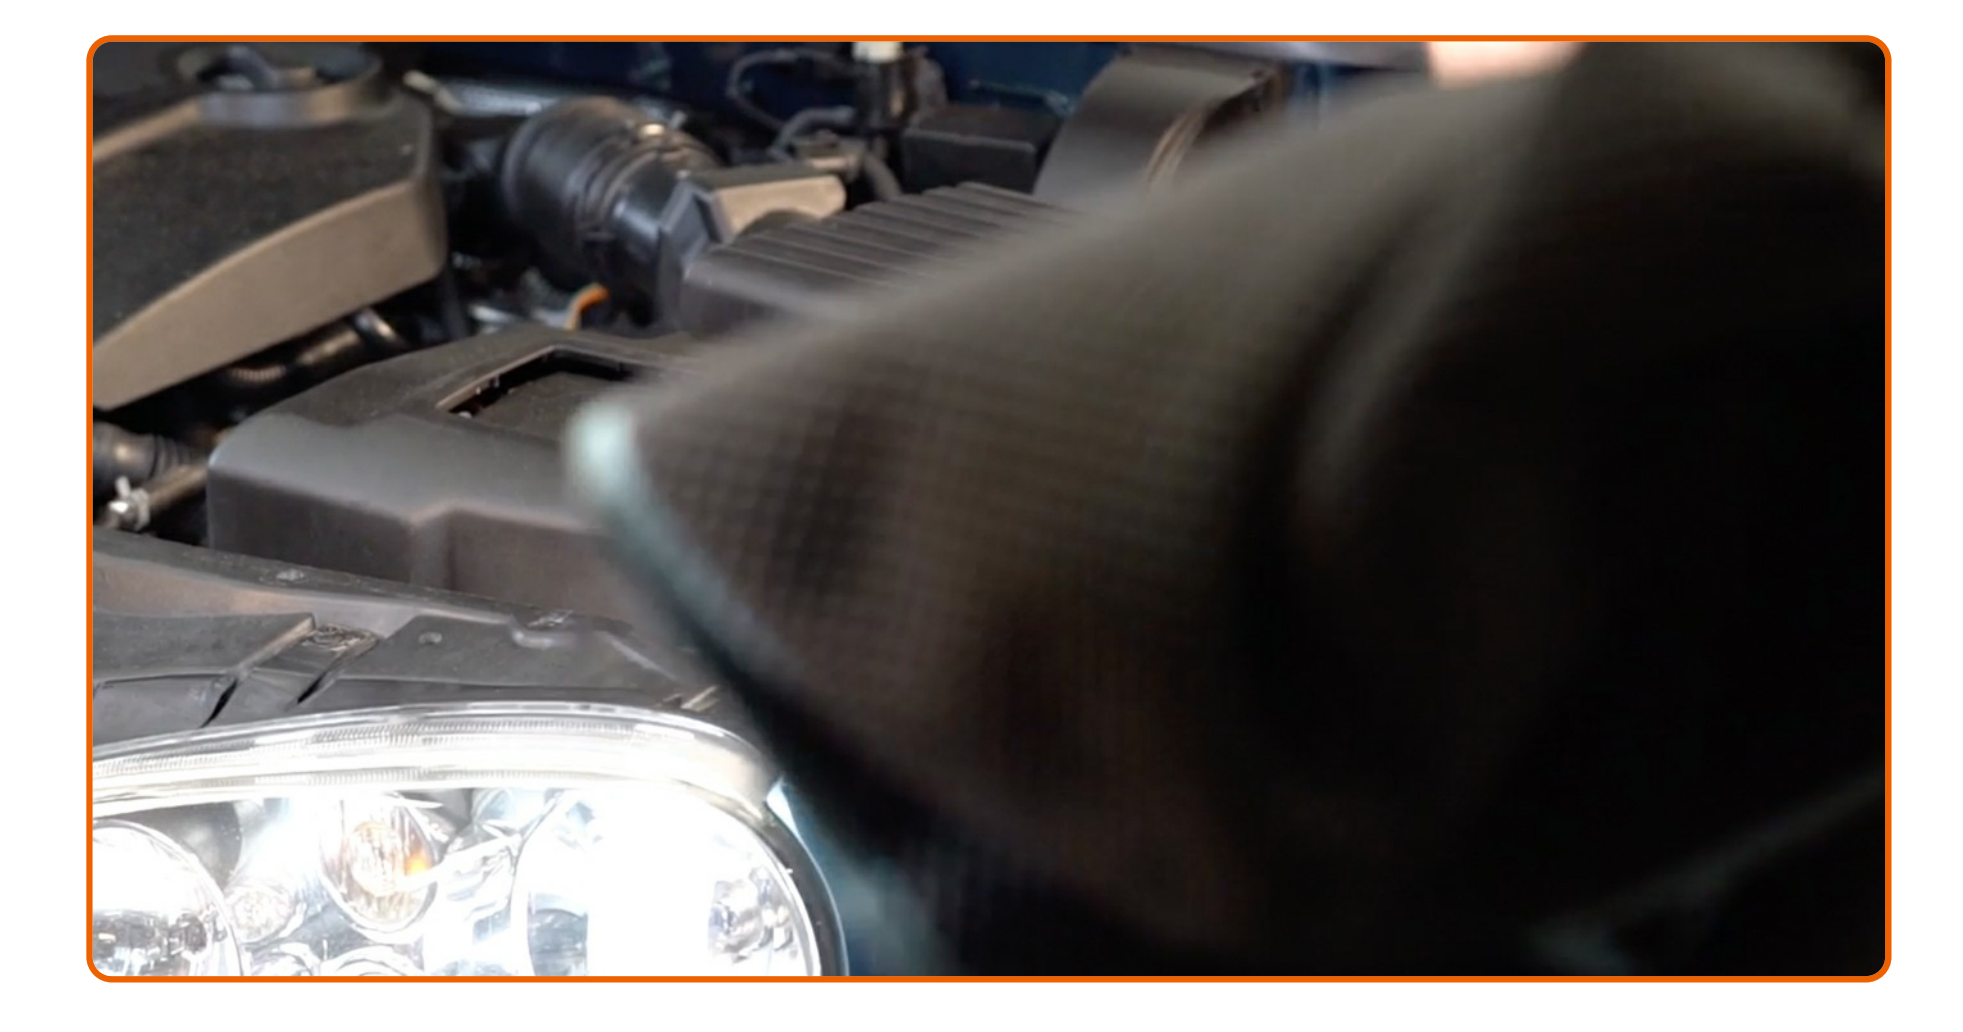

Remove the fender protection cover.

19



Close the hood.

DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES


NO



BECOME A MEMBER OF AUTODOC CLUB!

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

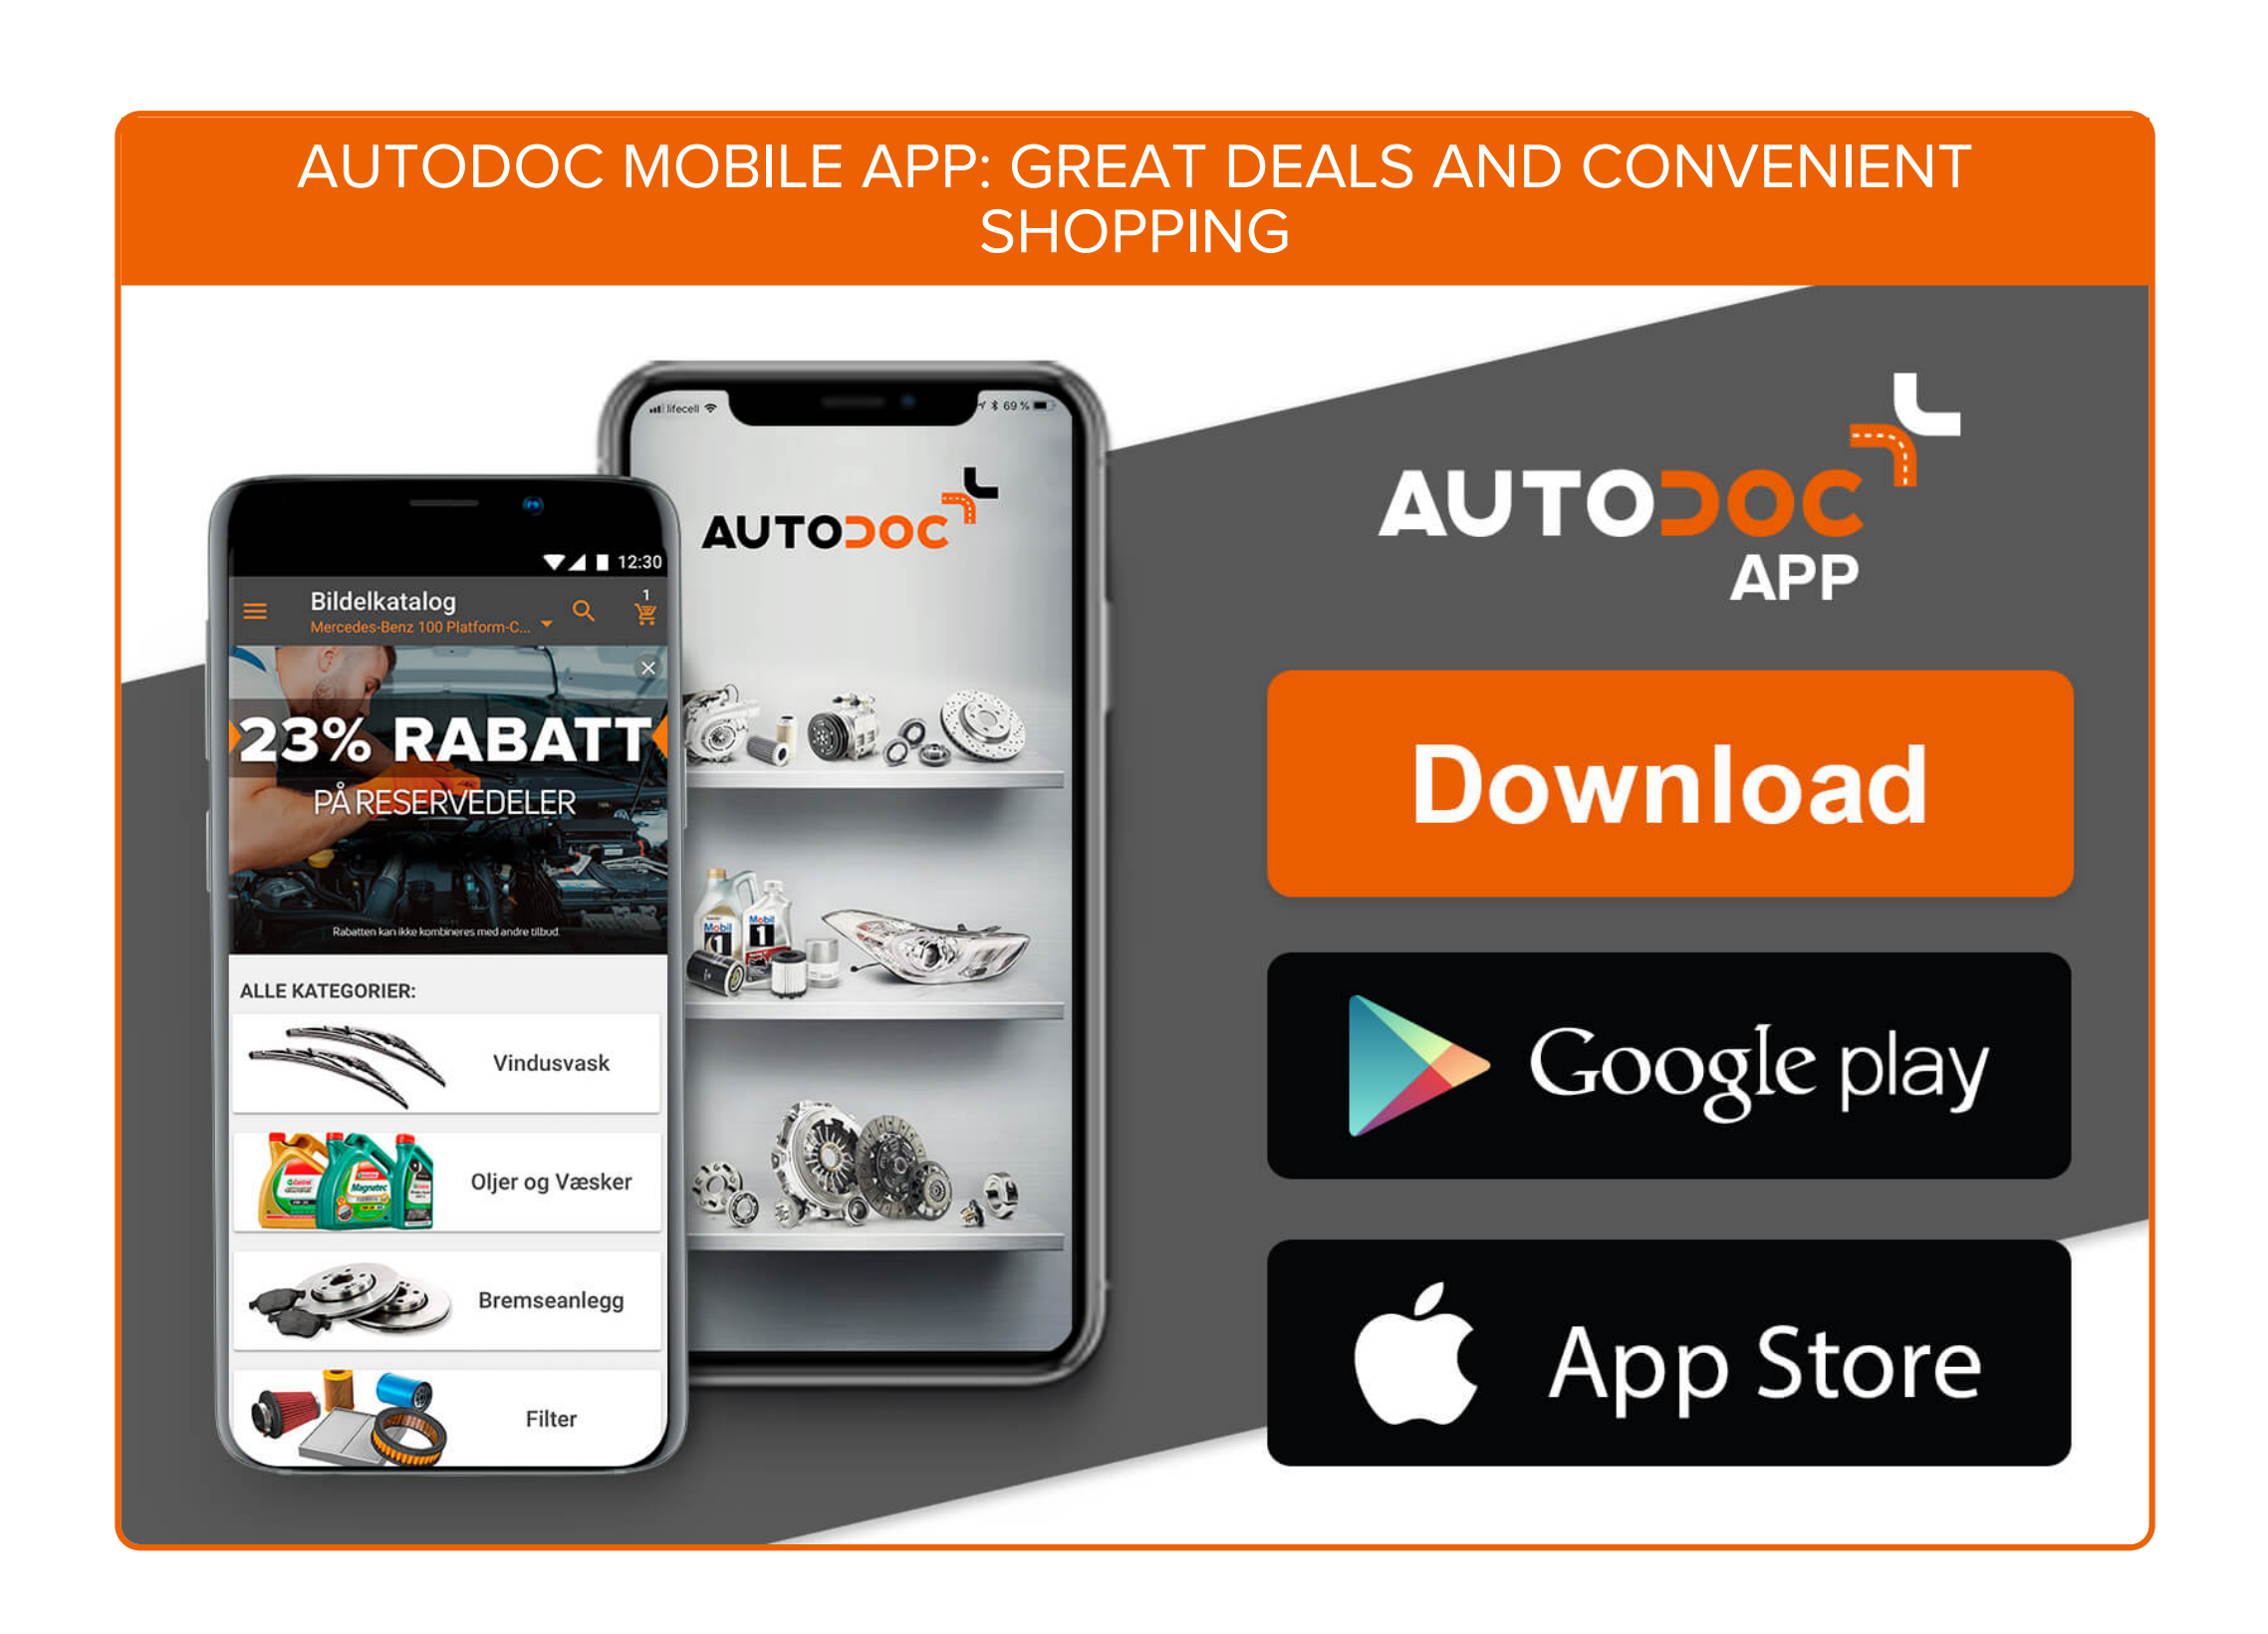

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR




BUY SPARE PARTS FOR VOLKSWAGEN



AIR FILTER: A WIDE SELECTION

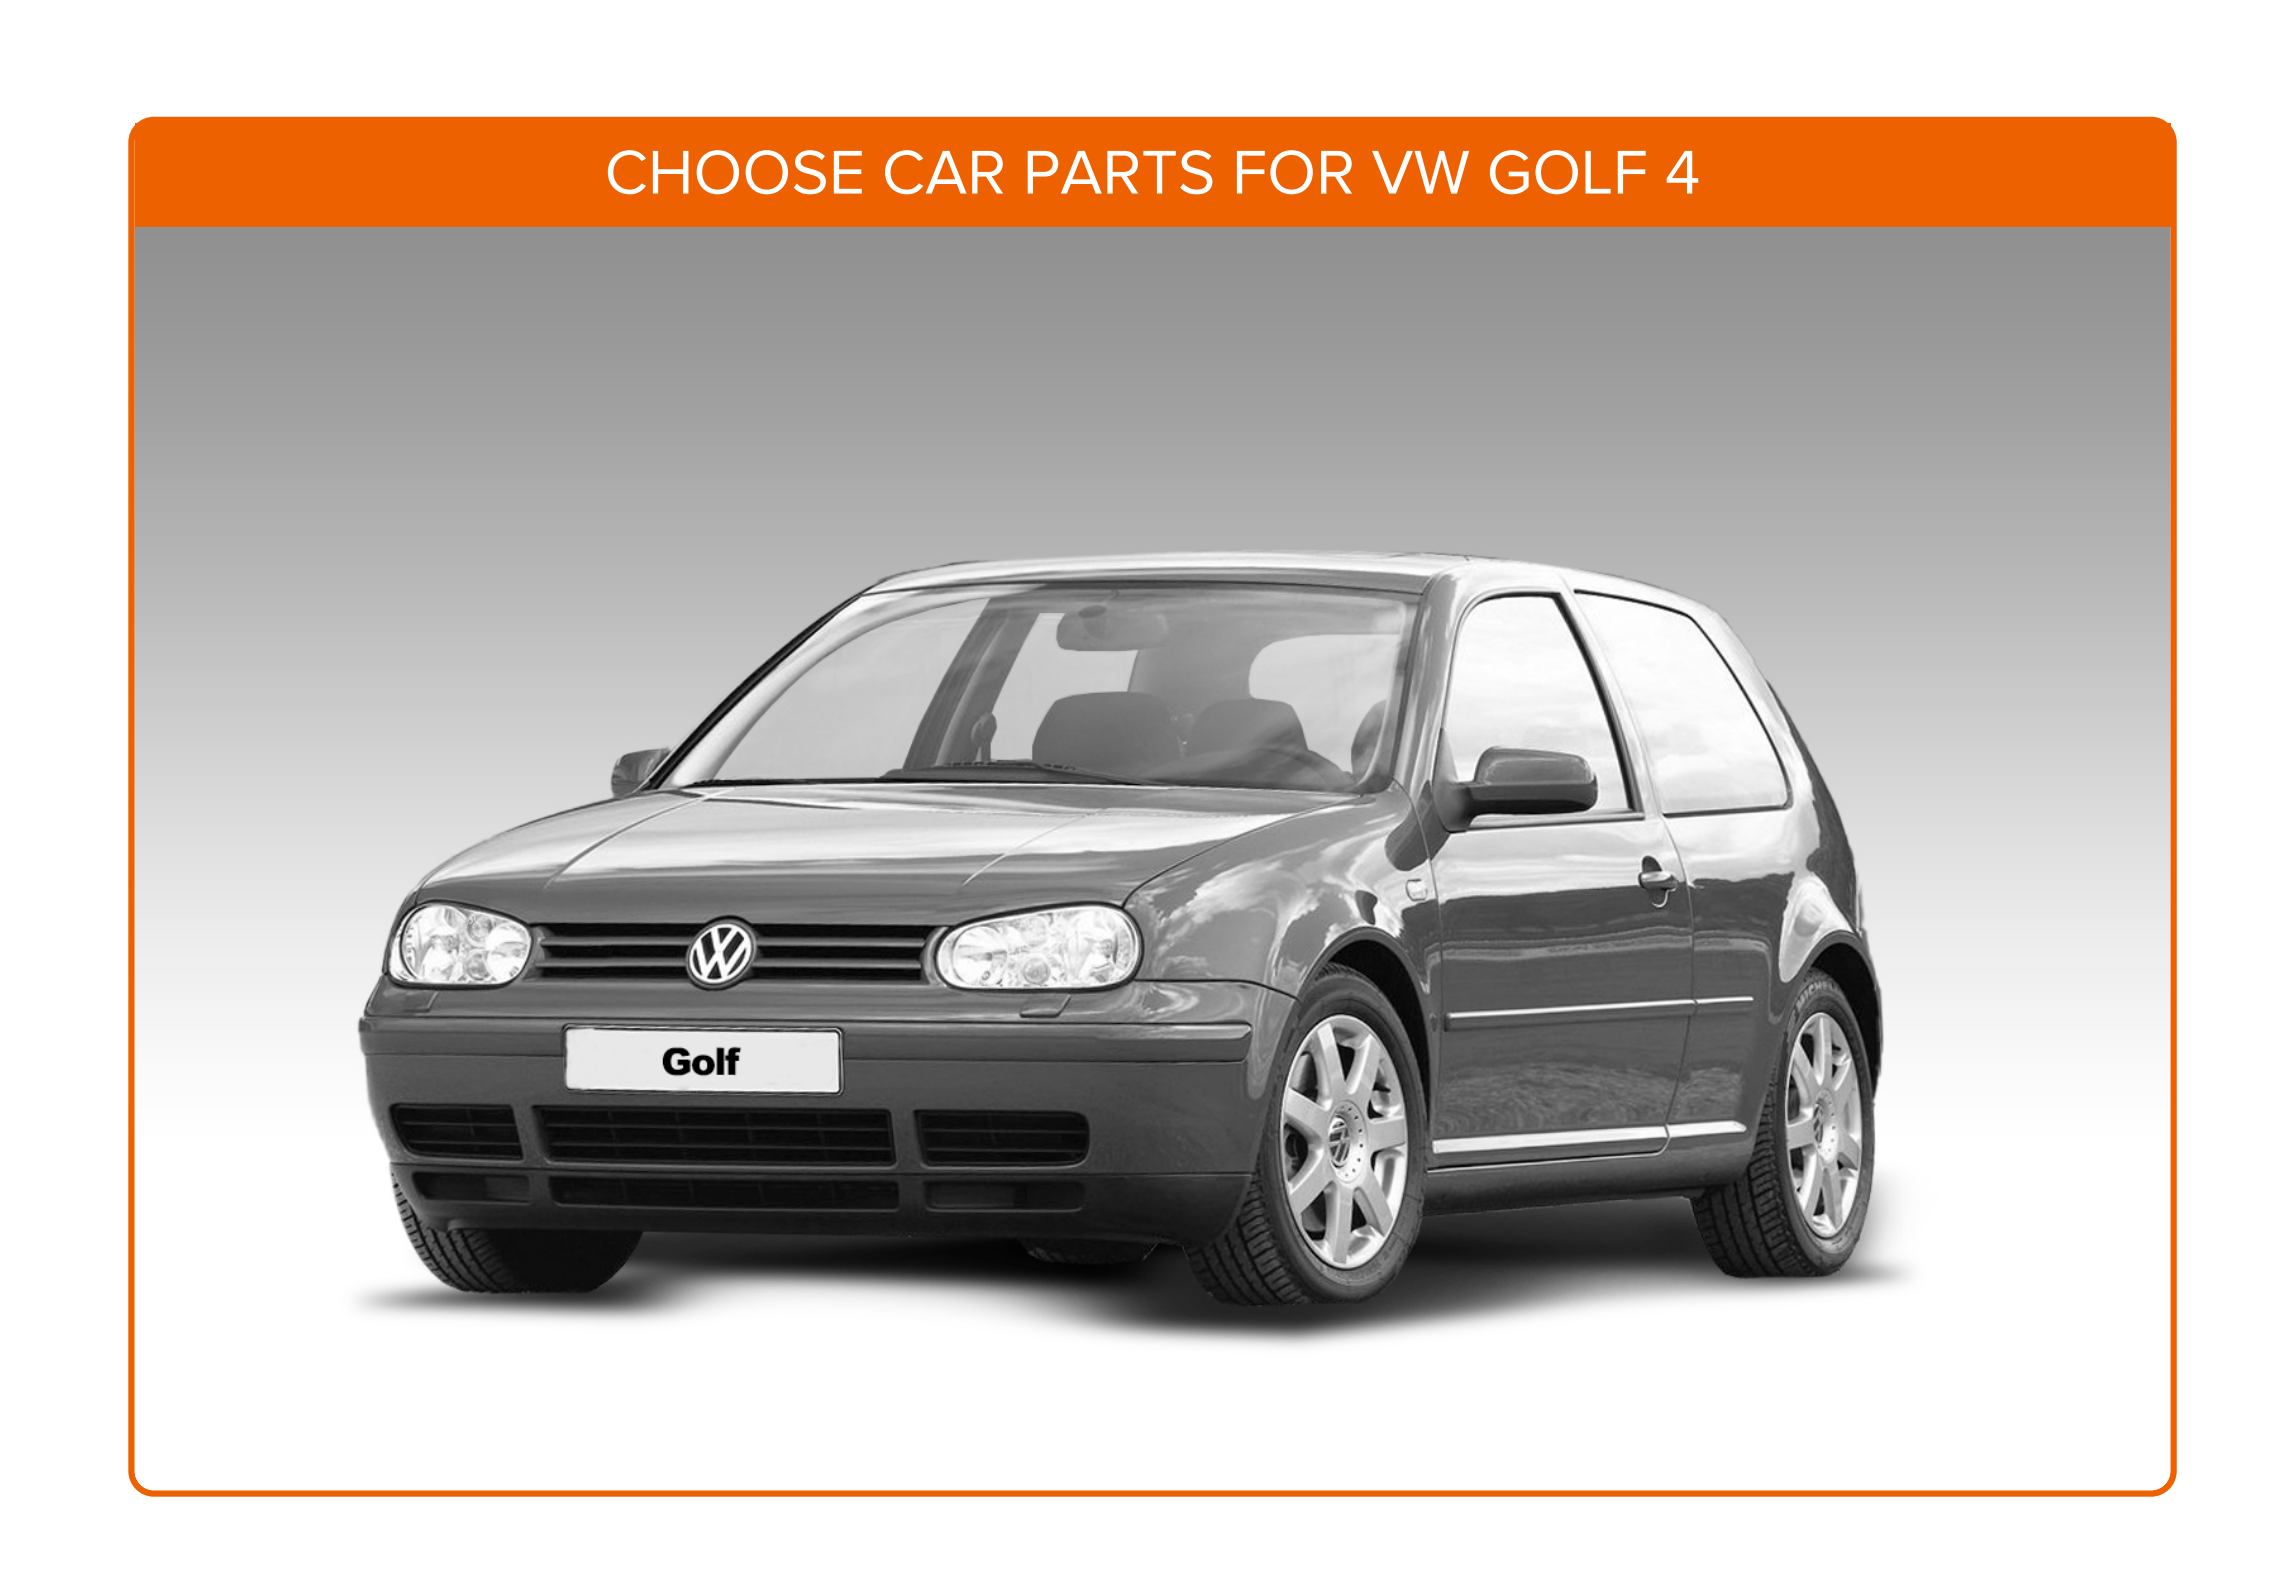



CHOOSE CAR PARTS FOR VW GOLF 4
Golf


AIR FILTER FOR VW: BUY NOW



AIR FILTER FOR VW GOLF 4: THE BEST DEALS & OFFERS

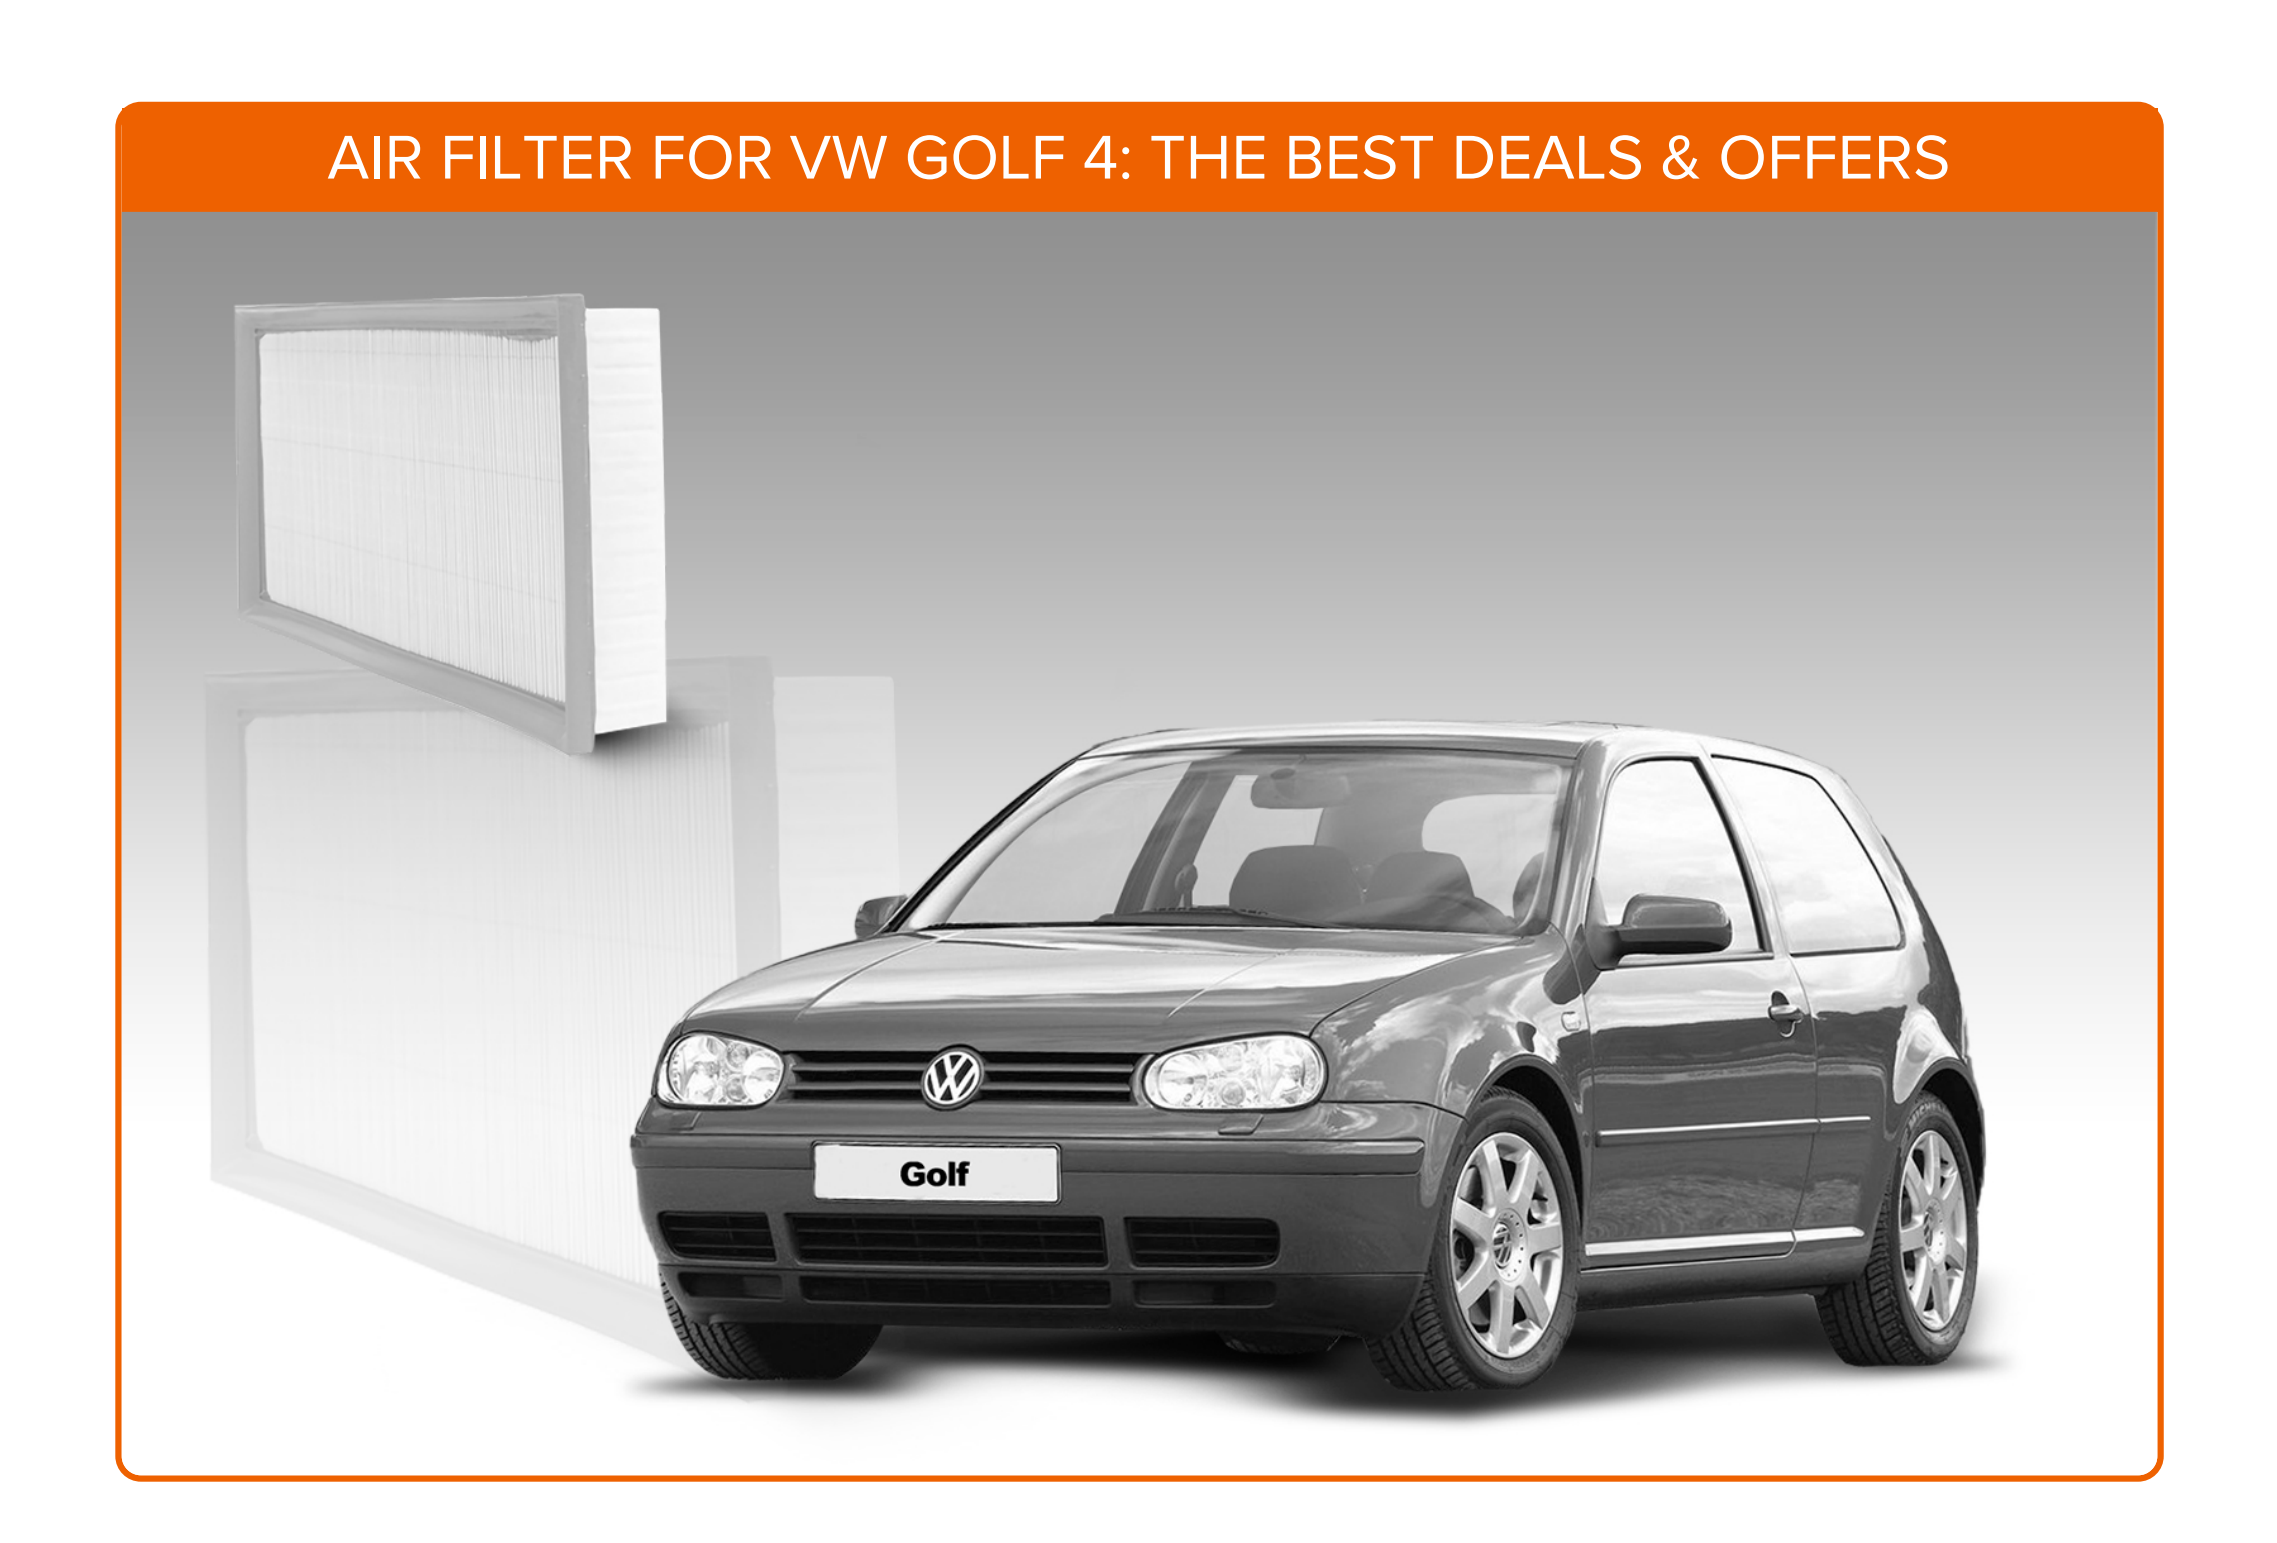

Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.